

Part	Description	Quantity
AA	5 in. fixture	1
BB	Mounting bracket	1
CC	4 in. mounting clip spring	3
DD	E26 adapter with male connector	1
EE	Stripped wires with male connector	1
GG	4 in. mounting clip spring screws	3
HH	Ground wire screw	1
II	J-Box mounting screws	2
JJ	Wire connectors	2


Junction Box Installation

1 Turning Off the Power

- Turn the power OFF at the switch and fuse box or the circuit breaker.


2 Choosing a color temperature before installing

- Use the slide switch to choose a color temperature before installing.

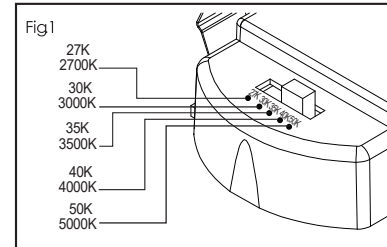


3 Connecting the wires

- Identify the wiring: (Black - line voltage, White - neutral)
- Connect the stripped wires with male connector (EE) to the two wires coming from the J-box: Black - line voltage to Black; White - neutral to White, using wire connectors provided (JJ).




4 Installing the mounting bracket to the junction box

- Install the mounting bracket (BB) to the J-box by inserting the two mounting screws (II) through the slots in mounting bracket (BB).
- Make sure the mounting bracket (BB) is installed with the label facing downwards. (Fig. 3)



5 Installing the fixture to the mounting bracket

- Secure the fixture (AA) to the mounting bracket (BB) by pressing the fixture into the mounting bracket until the clips on the fixture engage together. Make sure the fixture is firmly locked into place. (Fig. 4)




Recessed Can Installation

1 Turning Off the Power

- Turn the power OFF at the switch and fuse box or the circuit breaker.
- Remove the existing trim installed in the recessed housing.


2 Choosing a color temperature before installing

- Use the slide switch to choose a color temperature before installing.




3 Remove the mounting bracket

- Remove the mounting bracket (BB) from the fixture (AA). (See Fig. 2).




4 Installing the 4 in. clip springs to the mounting bracket

- Install the 4in. clips springs (CC) to the mounting bracket (BB) using the three clip spring screws (GG) provided (See Fig. 3).
- Make sure the mounting bracket (BB) is installed with the label faced downwards (See Fig. 4).

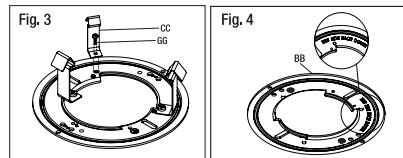

5 Installing the adapter and connect the terminals

- Install the E26 adapter (DD) into the socket. (Fig. 5).
- Connect the two terminals together. (Fig. 6).

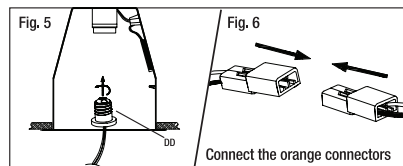

6 Installing the fixture into the recessed housing

- Install the fixture back into the mounting bracket (BB)
- Gently push the fixture (AA) into the recessed housing. (See Fig. 7)

