


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:119.93V I:0.1691A P:16.807W PF:0.8285 Freq:60.01Hz Lamp Flux:2066.32x1 lm		
NAME: VO-T5FIXW18FT4-120-3WAY-S-D	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.: 240312-021
MFR.: EVERFINE	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 122.94 lm/W
MODEL	VO-T5FIXW18FT4-120-3WAY-S-D	I _{max} (cd)	612.7	S/MH(C0/180)	1.32	
NOMINAL POWER(W)		LOR(%)	100.0	S/MH(C90/270)	1.26	
RATED VOLTAGE(V)	120	TOTAL FLUX(lm)	2066.3	η UP,DN(C0-180)	3.0,46.8	
NOMINAL FLUX(lm)	2066.32	CIE CLASS	DIRECT	η UP,DN(C180-360)	3.0,47.2	
LAMPS INSIDE	1	η up (%)	6.0	CIBSE SHR NOM	1.50	
TEST VOLTAGE(V)	120	η down (%)	94.0	CIBSE SHR MAX	1.50	

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

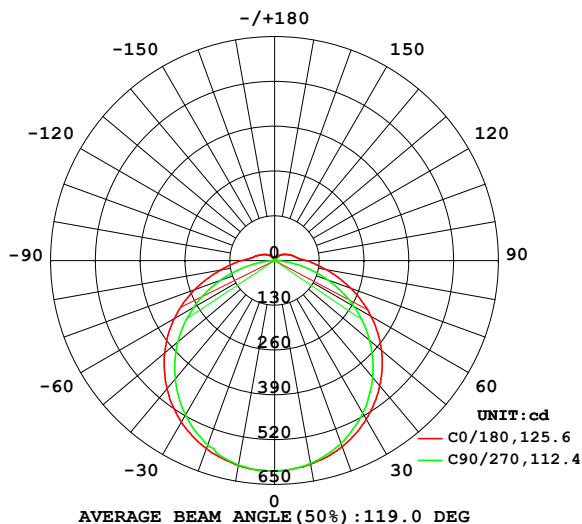

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

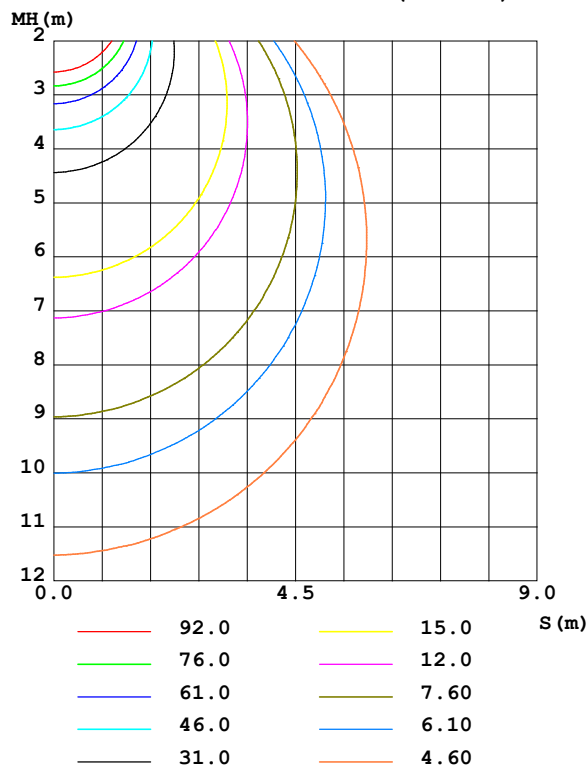

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3 °C
Operators: CJ
Test Date: 2024-03-12

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.460
Humidity: 55%
Test Distance: 9.460m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	600.3	600.4	598.0	601.4	603.9	603.5	602.8	599.7	0- 10	57.82	57.82	2.8,2.8
20	574.5	570.2	564.5	573.3	580.7	578.2	569.3	571.4	10- 20	166.3	224.2	10.8,10.8
30	532.6	523.4	512.1	527.9	542.2	533.4	517.6	524.9	20- 30	254.4	478.5	23.2,23.2
40	474.9	460.9	442.6	466.5	486.1	473.2	448.8	463.4	30- 40	311.3	789.8	38.2,38.2
50	404.9	385.4	359.9	391.8	416.8	398.6	366.6	389.0	40- 50	330.4	1120	54.2,54.2
60	323.3	298.9	265.8	306.6	336.2	312.1	271.2	302.7	50- 60	310.3	1431	69.2,69.2
70	235.3	206.2	164.5	214.4	246.8	217.3	167.3	208.7	60- 70	253.1	1684	81.5,81.5
80	151.9	117.3	63.45	123.9	159.3	124.8	63.82	118.1	70- 80	170.2	1854	89.7,89.7
90	92.51	58.78	1.171	61.52	95.99	61.77	1.145	59.40	80- 90	88.93	1943	94,94
100	62.60	31.78	1.329	32.58	62.31	33.37	1.408	33.21	90-100	43.30	1986	96.1,96.1
110	48.88	26.05	1.783	25.94	47.14	27.44	1.803	26.86	100-110	30.74	2017	97.6,97.6
120	37.15	15.54	2.191	20.61	35.85	20.88	2.172	17.59	110-120	21.87	2039	98.7,98.7
130	27.51	10.65	2.579	12.87	26.56	11.74	2.534	9.033	120-130	14.09	2053	99.3,99.3
140	14.84	2.943	2.980	4.929	15.15	4.303	2.882	2.955	130-140	7.696	2060	99.7,99.7
150	3.191	3.184	3.323	3.296	4.179	3.218	3.211	3.264	140-150	2.945	2063	99.9,99.9
160	3.441	3.467	3.606	3.625	3.415	3.415	3.560	3.448	150-160	1.554	2065	99.9,99.9
170	3.698	3.698	3.849	3.757	3.705	3.645	3.810	3.724	160-170	1.023	2066	100,100
180	3.902	3.836	3.948	3.915	3.836	3.803	3.961	3.928	170-180	0.3621	2066	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:CJ
Test Date:2024-03-12

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.460
Humidity:55%
Test Distance:9.460m [K=1.0000]
Remarks:

LUMINANCE LIMITATION CURVES

Test:U:119.93V I:0.1691A P:16.807W PF:0.8285 Freq:60.01Hz Lamp Flux:2066.32x1 lm		
NAME: VO-T5FIXW18FT4-120-3WAY-S-D	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.: 240312-021
MFR.: EVERFINE	SUR.:	Shielding Angle:

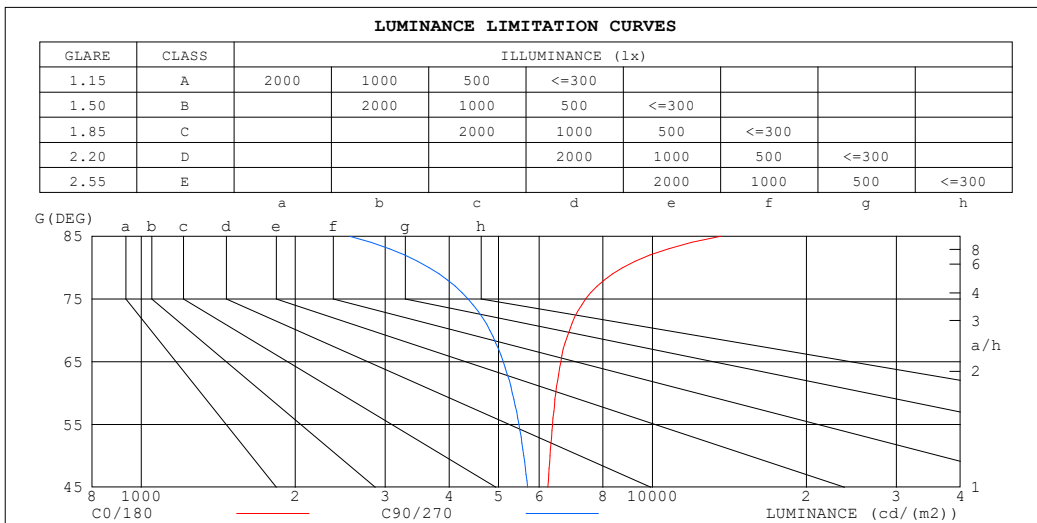


C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3°C
Operators: CJ
Test Date: 2024-03-12

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.460
Humidity: 55%
Test Distance: 9.460m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:119.93V I:0.1691A P:16.807W PF:0.8285 Freq:60.01Hz Lamp Flux:2066.32x1 lm		
NAME: VO-T5FIXW18FT4-120-3WAY-S-D	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.: 240312-021
MFR.: EVERFINE	SUR.:	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio Coefficients of Utilization(CU)															
0.0	1.18	1.18	1.18	1.14	1.14	1.14	1.08	1.08	1.08	1.02	1.02	1.02	.97	.97	.97	.94
1.0	1.01	.96	.92	.98	.93	.90	.92	.89	.86	.87	.85	.82	.83	.81	.78	.76
2.0	.87	.80	.73	.85	.78	.72	.80	.74	.69	.76	.71	.67	.72	.68	.65	.62
3.0	.76	.67	.60	.74	.66	.59	.70	.63	.58	.66	.61	.56	.63	.58	.54	.52
4.0	.67	.58	.51	.65	.57	.50	.62	.55	.49	.59	.53	.47	.56	.51	.46	.44
5.0	.60	.50	.43	.58	.49	.43	.55	.48	.42	.53	.46	.41	.50	.44	.40	.38
6.0	.54	.44	.38	.52	.44	.37	.50	.42	.36	.48	.41	.36	.45	.39	.35	.33
7.0	.48	.39	.33	.47	.39	.33	.45	.38	.32	.43	.37	.32	.41	.35	.31	.29
8.0	.44	.35	.29	.43	.35	.29	.41	.34	.29	.40	.33	.28	.38	.32	.28	.26
9.0	.40	.32	.26	.40	.32	.26	.38	.31	.26	.36	.30	.25	.35	.29	.25	.23
10.0	.37	.29	.24	.36	.29	.24	.35	.28	.23	.34	.27	.23	.32	.27	.22	.21

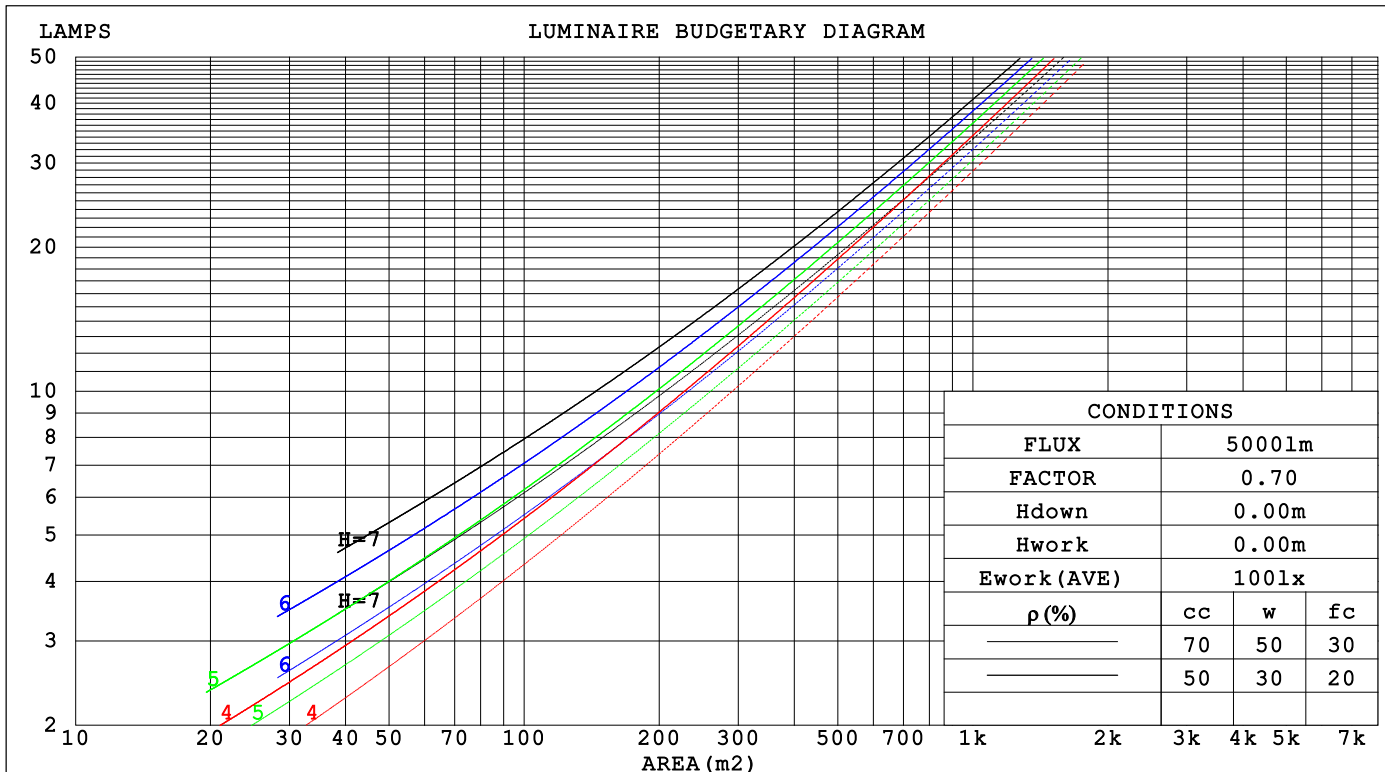

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:CJ
Test Date:2024-03-12

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.460
Humidity:55%
Test Distance:9.460m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:119.93V I:0.1691A P:16.807W PF:0.8285 Freq:60.01Hz Lamp Flux:2066.32x1 lm		
NAME: VO-T5FIXW18FT4-120-3WAY-S-D	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.: 240312-021
MFR.: EVERFINE	SUR.:	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)										
0.0																	
1.0	.344	.195	.062	.335	.191	.061	.318	.182	.058	.302	.174	.056	.288	.167	.054		
2.0	.311	.171	.052	.303	.167	.051	.288	.160	.050	.274	.154	.048	.262	.148	.047		
3.0	.283	.151	.045	.276	.148	.044	.262	.142	.043	.250	.137	.042	.238	.132	.041		
4.0	.258	.134	.039	.252	.132	.039	.240	.127	.038	.229	.123	.037	.218	.119	.036		
5.0	.237	.121	.035	.231	.119	.035	.220	.115	.034	.210	.111	.033	.201	.107	.032		
6.0	.218	.109	.031	.213	.108	.031	.204	.104	.030	.194	.101	.030	.186	.098	.029		
7.0	.202	.100	.028	.198	.099	.028	.189	.096	.028	.181	.093	.027	.173	.090	.026		
8.0	.188	.092	.026	.184	.091	.026	.176	.088	.025	.169	.086	.025	.162	.083	.024		
9.0	.176	.085	.024	.172	.084	.024	.165	.082	.023	.158	.079	.023	.152	.077	.022		
10.0	.165	.079	.022	.162	.078	.022	.155	.076	.021	.149	.074	.021	.143	.072	.021		

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients (CCEC)										
0.0	.236	.236	.236	.202	.202	.202	.138	.138	.138	.079	.079	.079	.025	.025	.025		
1.0	.229	.202	.178	.196	.173	.153	.134	.119	.106	.077	.069	.061	.025	.022	.020		
2.0	.221	.178	.142	.189	.153	.123	.130	.106	.086	.075	.062	.050	.024	.020	.016		
3.0	.213	.161	.119	.183	.139	.103	.126	.096	.072	.073	.056	.043	.023	.018	.014		
4.0	.206	.148	.104	.177	.128	.090	.121	.089	.063	.070	.052	.038	.023	.017	.012		
5.0	.198	.138	.093	.170	.119	.081	.117	.083	.057	.068	.049	.034	.022	.016	.011		
6.0	.191	.129	.085	.164	.112	.074	.113	.079	.053	.066	.046	.031	.021	.015	.010		
7.0	.184	.123	.080	.158	.106	.070	.109	.075	.049	.063	.044	.029	.021	.014	.010		
8.0	.177	.117	.076	.153	.101	.066	.106	.071	.047	.061	.042	.028	.020	.014	.009		
9.0	.171	.112	.072	.147	.097	.063	.102	.068	.045	.059	.040	.027	.019	.013	.009		
10.0	.165	.108	.070	.143	.094	.061	.099	.066	.043	.058	.039	.026	.019	.013	.009		

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:CJ
Test Date:2024-03-12

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.460
Humidity:55%
Test Distance:9.460m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:119.93V I:0.1691A P:16.807W PF:0.8285 Freq:60.01Hz Lamp Flux:2066.32x1 lm										
NAME: VO-T5FIXW18FT4-120-3WAY-S-D					TYPE:			WEIGHT:		
SPEC.:					DIM.:			SERIAL No.: 240312-021		
MFR.: EVERFINE					SUR.:			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	16.5	18.0	16.9	18.3	18.7	15.8	17.3	16.1	17.6	17.9
3H	18.5	19.9	18.9	20.2	20.6	17.3	18.7	17.7	19.0	19.4
4H	19.5	20.8	19.9	21.1	21.5	17.9	19.2	18.3	19.5	19.9
6H	20.4	21.7	20.8	22.0	22.5	18.2	19.5	18.7	19.9	20.3
8H	20.9	22.1	21.4	22.5	22.9	18.3	19.5	18.8	19.9	20.4
12H	21.5	22.6	21.9	23.0	23.5	18.4	19.5	18.8	19.9	20.4
4H 2H	17.1	18.4	17.5	18.8	19.2	16.5	17.8	16.9	18.2	18.6
3H	19.3	20.4	19.7	20.9	21.3	18.3	19.4	18.7	19.8	20.2
4H	20.4	21.5	20.9	21.9	22.4	19.0	20.0	19.4	20.5	20.9
6H	21.6	22.5	22.1	23.0	23.5	19.5	20.4	20.0	20.9	21.4
8H	22.2	23.1	22.7	23.5	24.1	19.7	20.5	20.2	21.0	21.5
12H	22.9	23.7	23.4	24.2	24.7	19.8	20.6	20.3	21.1	21.6
8H 4H	20.7	21.6	21.2	22.1	22.6	19.5	20.3	20.0	20.8	21.3
6H	22.1	22.8	22.6	23.3	23.9	20.2	21.0	20.8	21.5	22.0
8H	22.9	23.5	23.4	24.1	24.7	20.5	21.2	21.1	21.7	22.3
12H	23.8	24.4	24.4	24.9	25.5	20.7	21.3	21.3	21.8	22.4
12H 4H	20.7	21.5	21.2	22.0	22.6	19.6	20.4	20.1	20.9	21.4
6H	22.2	22.8	22.7	23.4	24.0	20.4	21.1	21.0	21.6	22.2
8H	23.1	23.6	23.6	24.2	24.8	20.8	21.4	21.4	21.9	22.5
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 0.1 / - 0.1					+ 0.1 / - 0.2				
1.5H	+ 0.2 / - 0.3					+ 0.2 / - 0.3				
2.0H	+ 0.2 / - 0.3					+ 0.1 / - 0.4				

CIE Pub.117, 2066 lm Total Lamp Luminous Flux Correct (8log(F/F0) = 2.5)
Area: 0.1 m2

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:CJ
Test Date:2024-03-12

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.460
Humidity:55%
Test Distance:9.460m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:119.93V I:0.1691A P:16.807W PF:0.8285 Freq:60.01Hz Lamp Flux:2066.32x1 lm		
NAME: VO-T5FIXW18FT4-120-3WAY-S-D	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.: 240312-021
MFR.: EVERFINE	SUR.:	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	54	42	35	53	41	34	51	41	34	28
0.80	63	51	43	62	51	43	60	50	43	35
1.00	72	60	52	70	59	51	67	60	51	43
1.25	79	67	59	77	66	59	74	64	58	50
1.50	84	73	65	82	72	64	78	69	63	54
2.00	91	81	74	88	80	73	84	77	71	62
2.50	95	86	79	92	84	78	88	81	76	66
3.00	98	91	84	96	89	83	91	85	80	70
4.00	103	96	91	100	94	89	95	90	86	75
5.00	105	100	95	102	97	93	97	93	89	78
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:CJ
Test Date:2024-03-12

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.460
Humidity:55%
Test Distance:9.460m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:119.93V I:0.1691A P:16.807W PF:0.8285 Freq:60.01Hz Lamp Flux:2066.32x1 lm		
NAME: VO-T5FIXW18FT4-120-3WAY-S-D	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.: 240312-021
MFR.: EVERFINE	SUR.:	Shielding Angle:

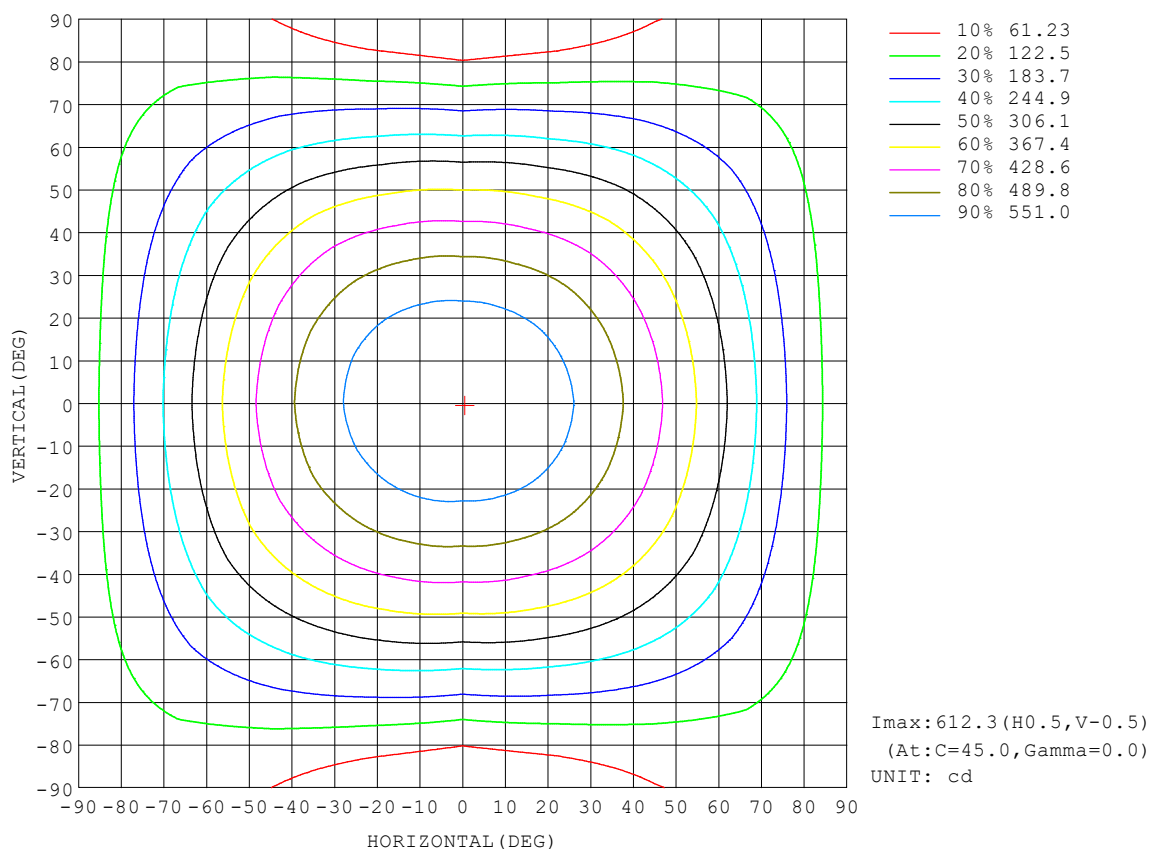


C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:CJ
Test Date:2024-03-12

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.460
Humidity:55%
Test Distance:9.460m [K=1.0000]
Remarks:

AAI CURVES

Test:U:119.93V I:0.1691A P:16.807W PF:0.8285 Freq:60.01Hz Lamp Flux:2066.32x1 lm		
NAME: VO-T5FIXW18FT4-120-3WAY-S-D	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.: 240312-021
MFR.: EVERFINE	SUR.:	Shielding Angle:

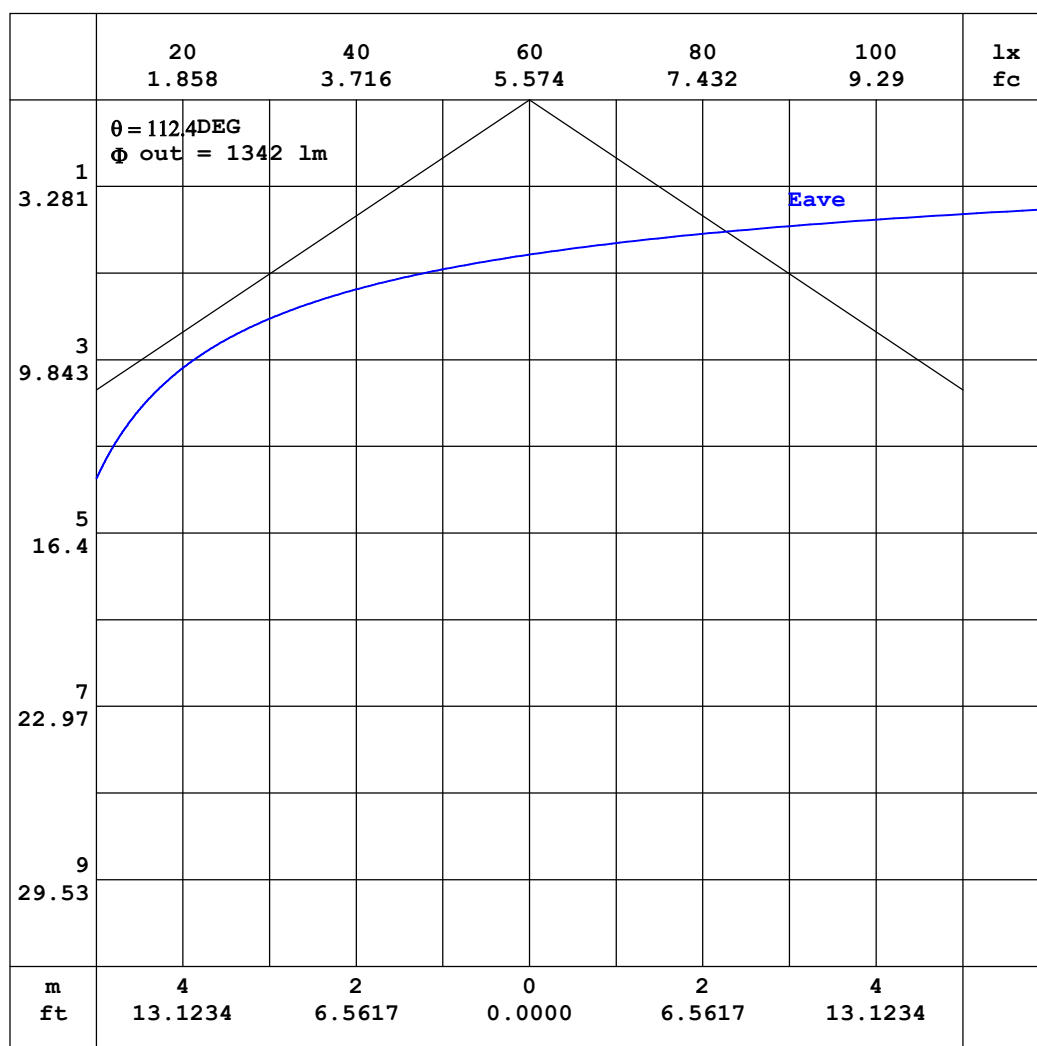


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3°C
Operators: CJ
Test Date: 2024-03-12

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.460
Humidity: 55%
Test Distance: 9.460m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:119.93V I:0.1691A P:16.807W PF:0.8285 Freq:60.01Hz Lamp Flux:2066.32x1 lm		
NAME: VO-T5FIXW18FT4-120-3WAY-S-D	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.: 240312-021
MFR.: EVERFINE	SUR.:	Shielding Angle:

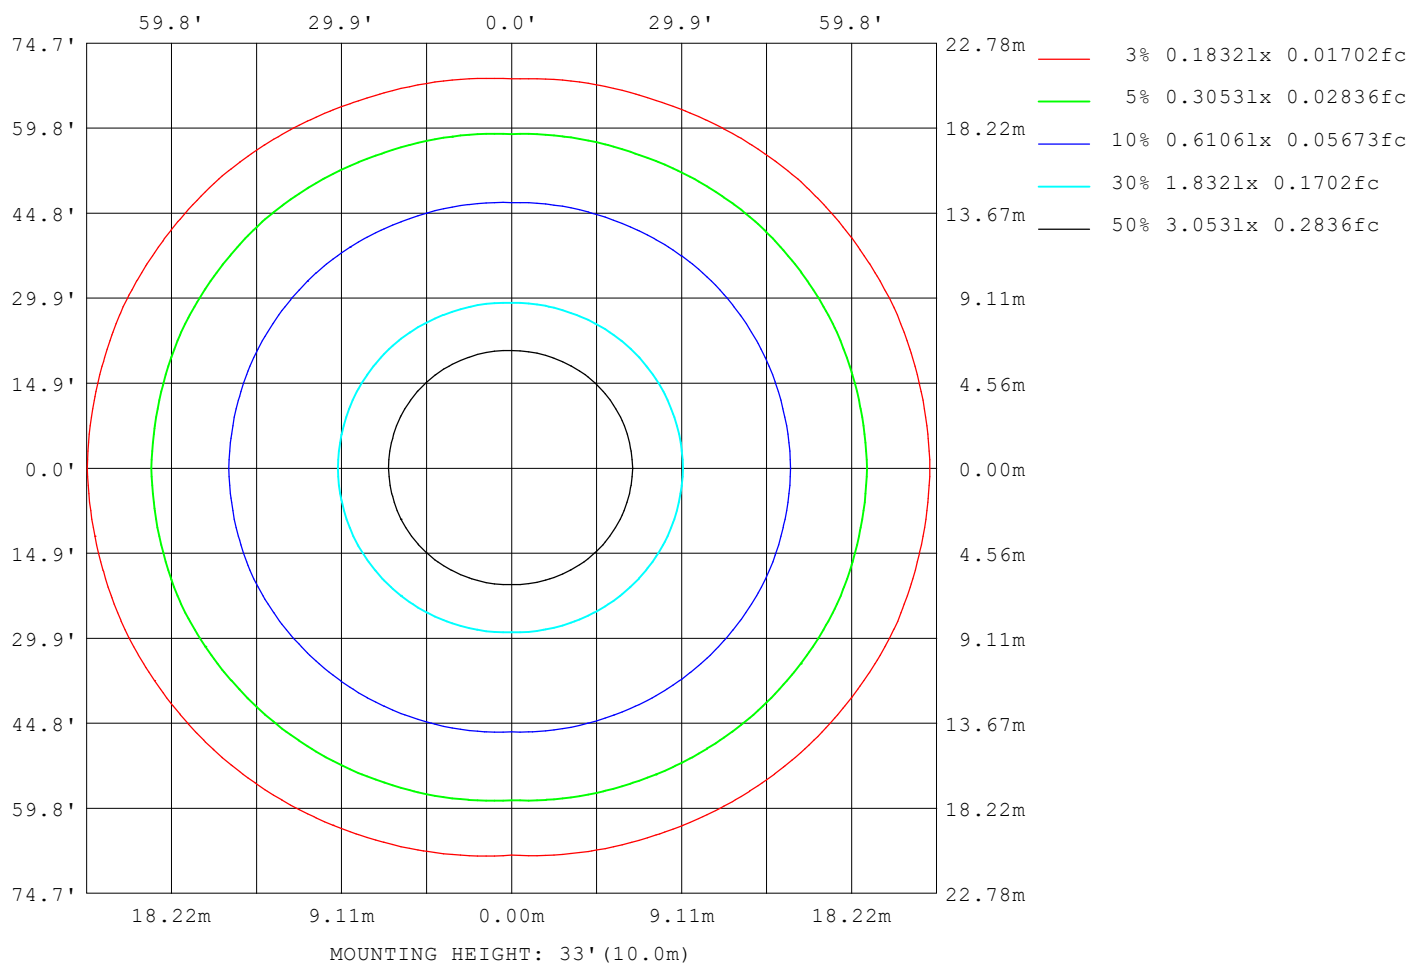

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:CJ
Test Date:2024-03-12

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.460
Humidity:55%
Test Distance:9.460m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:119.93V I:0.1691A P:16.807W PF:0.8285 Freq:60.01Hz Lamp Flux:2066.32x1 lm		
NAME: VO-T5FIXW18FT4-120-3WAY-S-D	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.: 240312-021
MFR.: EVERFINE	SUR.:	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	6765
L_0~180 (75) av	7591
L_0~180 (85) av	13903
L_90~270 (65) av	5157
L_90~270 (75) av	4384
L_90~270 (85) av	2525
L_45 (65) av	6128
L_45 (75) av	6370
L_45 (85) av	9762

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:CJ
Test Date:2024-03-12

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.460
Humidity:55%
Test Distance:9.460m [K=1.0000]
Remarks:

Planar Illuminance Curve

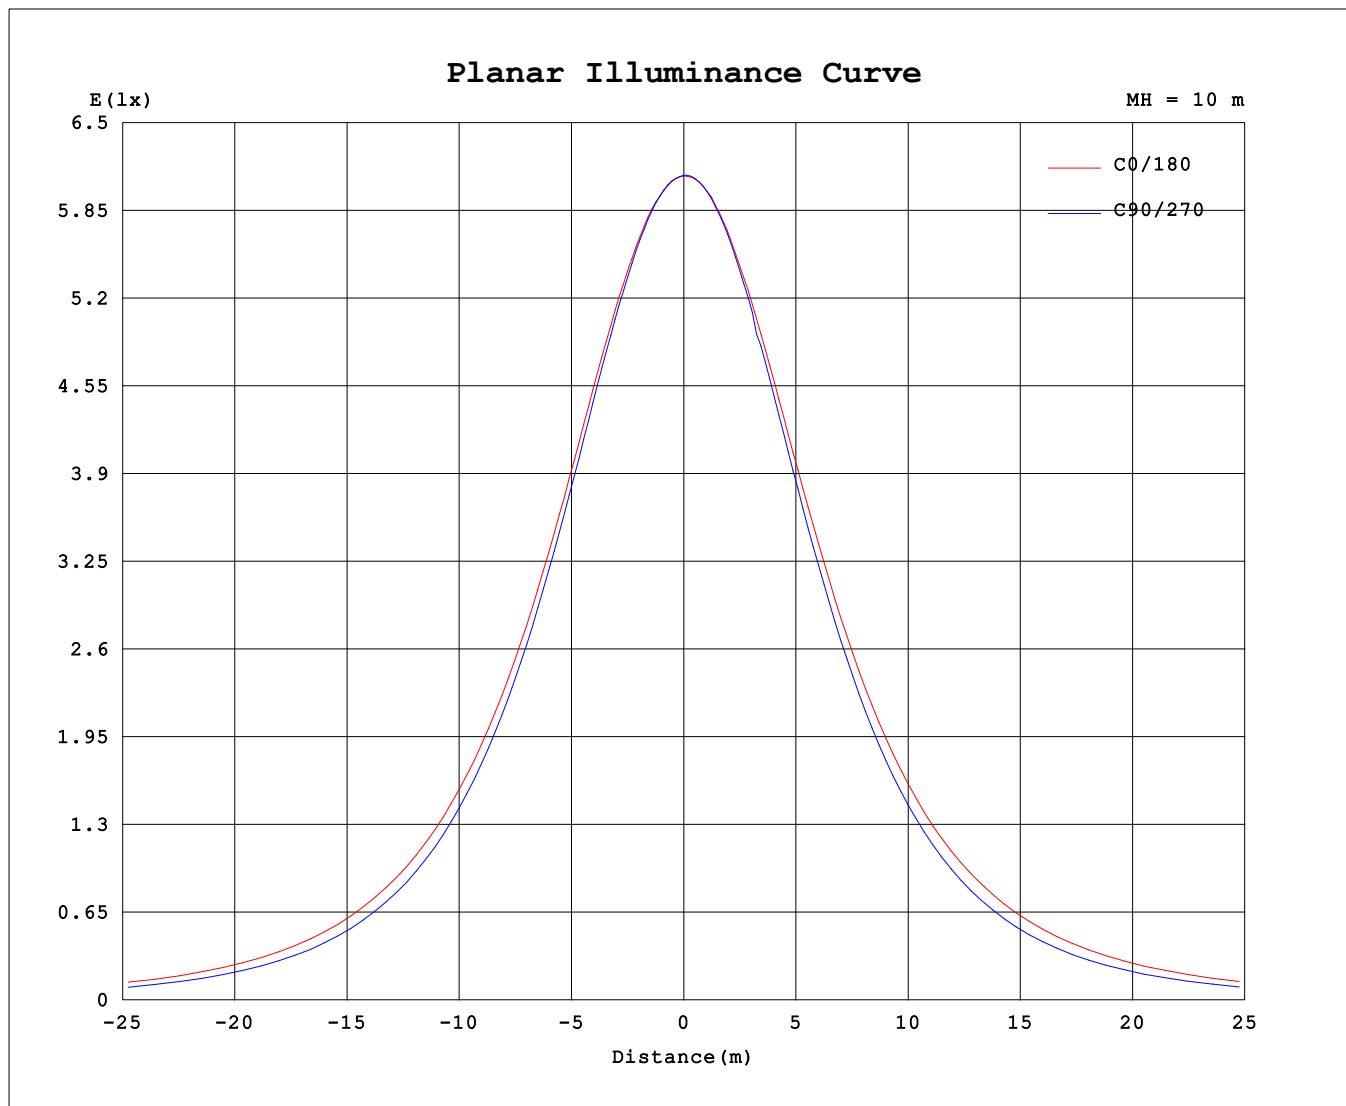

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3 °C
Operators: CJ
Test Date: 2024-03-12

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.460
Humidity: 55%
Test Distance: 9.460m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:119.93V I:0.1691A P:16.807W PF:0.8285 Freq:60.01Hz Lamp Flux:2066.32x1 lm		
NAME: VO-T5FIXW18FT4-120-3WAY-S-D	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.: 240312-021
MFR.: EVERFINE	SUR.:	Shielding Angle:

Table--1

UNIT: cd

C (DEG) γ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	611	610	613	612	611	610	610	608	611	610	613	612	611	610	610	608			
5	607	607	609	608	607	608	608	607	610	609	610	610	610	607	607	606			
10	600	600	600	599	598	600	601	602	604	604	604	603	603	599	600	599			
15	589	589	587	585	583	587	590	592	594	594	593	590	589	587	588	588			
20	574	573	570	567	565	569	573	578	581	581	578	573	569	569	571	573			
25	555	553	549	543	540	545	553	559	563	563	558	551	546	546	550	553			
30	533	529	523	516	512	518	528	537	542	540	533	524	518	519	525	529			
35	505	501	494	484	479	487	499	510	516	513	505	493	485	488	496	502			
40	475	470	461	449	443	452	466	480	486	483	473	458	449	453	463	470			
45	441	436	424	410	403	414	431	446	453	449	438	420	409	414	427	436			
50	405	399	385	370	360	374	392	410	417	411	399	378	367	373	389	399			
55	366	359	343	326	314	330	350	371	378	372	357	334	320	329	347	358			
60	323	317	299	279	266	284	307	329	336	329	312	287	271	282	303	317			
65	280	273	253	231	216	236	261	282	292	284	266	238	220	233	257	272			
70	235	227	206	182	164	187	214	237	247	238	217	187	167	183	209	227			
75	192	183	160	133	113	137	168	192	201	192	170	137	114	133	162	182			
80	152	142	117	87.1	63.5	90.8	124	150	159	150	125	89.9	63.8	86.5	118	142			
85	118	109	82.5	48.7	22.3	51.5	87.2	114	124	114	87.5	50.2	21.7	48.1	83.1	108			
90	92.5	83.5	58.8	26.5	1.17	27.8	61.5	87.0	96.0	87.1	61.8	27.0	1.15	26.6	59.4	83.5			
95	72.3	60.5	34.4	12.3	1.14	12.8	36.3	62.0	73.8	62.2	36.4	13.9	1.25	14.3	36.2	61.0			
100	62.6	51.7	31.8	12.4	1.33	11.6	32.6	51.1	62.3	51.7	33.4	12.9	1.41	13.2	33.2	52.3			
105	55.7	47.2	28.6	11.0	1.56	10.9	29.1	46.8	55.2	47.0	30.9	11.7	1.60	11.3	29.8	47.8			
110	48.9	40.9	26.0	9.09	1.78	9.82	25.9	40.6	47.1	41.0	27.4	10.3	1.80	9.48	26.9	42.5			
115	42.7	35.8	21.3	6.93	1.98	6.61	23.2	35.9	41.2	36.1	24.0	6.98	1.99	5.72	22.6	36.8			
120	37.2	32.0	15.5	3.49	2.19	5.00	20.6	31.6	35.8	31.8	20.9	5.37	2.17	2.54	17.6	32.5			
125	32.1	27.8	13.0	2.34	2.39	2.44	18.1	27.4	31.0	27.5	18.1	2.42	2.34	2.33	14.4	27.9			
130	27.5	19.8	10.7	2.51	2.58	2.63	12.9	23.5	26.6	23.4	11.7	2.60	2.53	2.51	9.03	22.1			
135	23.2	15.0	6.95	2.67	2.80	2.84	8.57	19.5	22.4	18.6	9.26	2.80	2.71	2.69	4.40	16.0			
140	14.8	10.8	2.94	2.86	2.98	3.01	4.93	12.6	15.1	11.4	4.30	2.97	2.88	2.88	2.95	8.76			
145	6.12	3.85	3.04	3.03	3.16	3.18	3.15	9.15	10.1	8.12	3.07	3.11	3.06	3.00	3.05	3.48			
150	3.19	3.20	3.18	3.18	3.32	3.31	3.30	3.24	4.18	3.09	3.22	3.22	3.21	3.18	3.26	3.36			
155	3.32	3.34	3.32	3.34	3.48	3.49	3.41	3.36	3.25	3.24	3.31	3.38	3.37	3.34	3.36	3.46			
160	3.44	3.46	3.47	3.49	3.61	3.61	3.62	3.47	3.42	3.37	3.42	3.51	3.56	3.49	3.45	3.55			
165	3.56	3.58	3.59	3.62	3.73	3.72	3.76	3.59	3.58	3.50	3.55	3.64	3.68	3.61	3.61	3.66			
170	3.70	3.68	3.70	3.74	3.85	3.84	3.76	3.72	3.70	3.61	3.65	3.74	3.81	3.73	3.72	3.86			
175	3.79	3.74	3.82	3.82	3.91	3.91	3.82	3.80	3.78	3.70	3.72	3.84	3.86	3.88	3.84	3.92			
180	3.90	3.75	3.84	3.88	3.95	3.93	3.91	3.90	3.84	3.77	3.80	3.88	3.96	3.98	3.93	3.88			

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:CJ
Test Date:2024-03-12

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.460
Humidity:55%
Test Distance:9.460m [K=1.0000]
Remarks: