




Linear Flush Mount LED

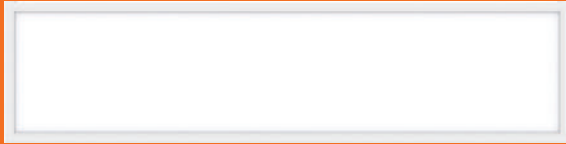

6"x2'

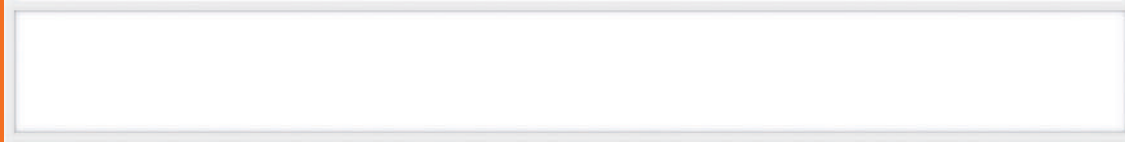

6"x4'



4"x4'



Specifications:

	SQUARE		
Model	PS1560-AL05-22W277-5CCT	PS15120-AL05-40W277-5CCT	PS10120-AL05-40W277-5CCT
Power	22W	40W/30W/20W	40W/30W/20W
CCT	2700K / 3000K / 3500K / 4000K / 5000K		
Brightness	2420LM	4400LM	4400LM
LED Type	SMD2835/256PCS	SMD2835/512PCS	SMD2835/512PCS
Voltage	AC120-277V		
Power Efficiency	≥0.9		
RA	≥80		
Beam Angle	120°		
Dimension	6"x2'x0.94"	6"x4'x0.94"	4"x4'x0.94"

Features:

- Bulit-in driver, 0.94 inch thickness
- Quick & Easy Installation
- Good quality LGP & diffuser Plate
- Stable design for the whole structure
- SMT technology, ensuring accurate for LEDs on FPCB
- 5CCT tunable
- Power Adjustable
- AC120-277V, 0-10V dimming
- 5 Years warranty

