


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:119.83V I:0.1016A P:11.690W PF:0.9602 Freq:59.98Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1049.73x1 lm		
NAME: VO-RP6W12-120-D-5WAY	TYPE:	WEIGHT:
SPEC.: 5000K 80	DIM.:	SERIAL No.:
MFR.: VOTATEC	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 89.80 lm/W
MODEL	VO-RP6W12-120-D-5WAY	I _{max} (cd)	371.7	S/MH(C0/180)	1.25	
NOMINAL POWER(W)	12	LOR(%)	100.0	S/MH(C90/270)	1.24	
RATED VOLTAGE(V)	120	TOTAL FLUX(lm)	1049.7	η UP,DN(C0-180)	0.0,50.3	
NOMINAL FLUX(lm)	1049.73	CIE CLASS	DIRECT	η UP,DN(C180-360)	0.0,49.7	
LAMPS INSIDE	1	η up (%)	0.0	CIBSE SHR NOM	1.25	
TEST VOLTAGE(V)	120	η down (%)	100.0	CIBSE SHR MAX	1.35	

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

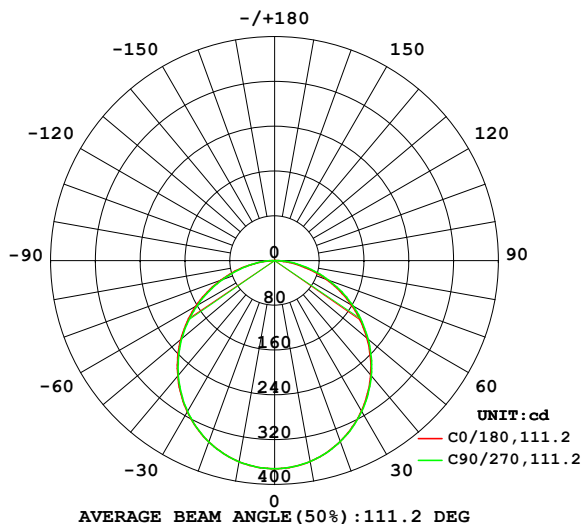

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

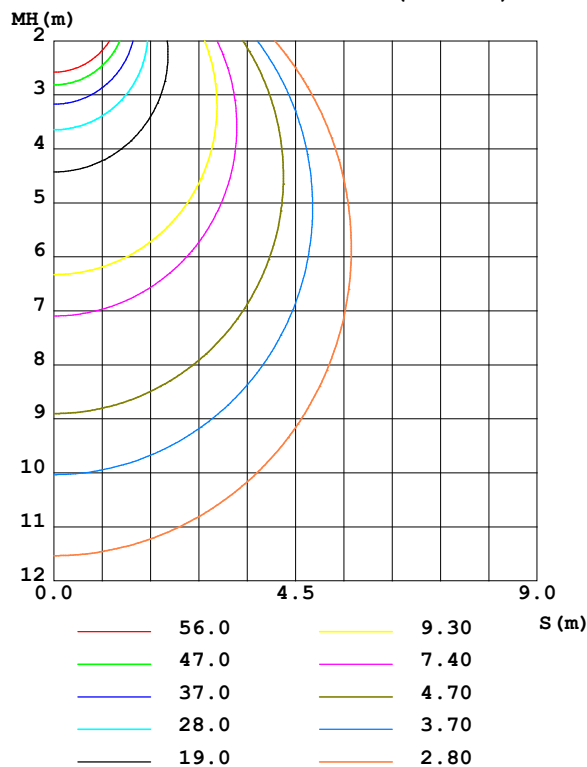

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:24.3℃
Operators:
Test Date:2024-04-01

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
Humidity:65.0%
Test Distance:3.080m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	364.6	364.7	364.6	364.3	365.1	364.7	365.0	364.6	0- 10	35.15	35.15	3.35,3.35
20	343.7	344.5	343.8	343.8	344.8	344.3	344.5	344.0	10- 20	100.4	135.6	12.9,12.9
30	310.3	311.9	311.2	310.7	312.1	311.5	311.2	310.5	20- 30	151.6	287.2	27.4,27.4
40	266.8	269.3	268.7	268.0	269.3	268.4	267.7	266.7	30- 40	181.9	469.1	44.7,44.7
50	215.4	218.6	218.1	217.3	218.9	217.7	216.5	215.3	40- 50	187.8	656.9	62.6,62.6
60	158.3	162.0	161.8	160.9	162.2	160.5	159.0	157.8	50- 60	169.2	826.1	78.7,78.7
70	98.72	103.1	103.1	102.3	102.6	100.4	98.88	97.84	60- 70	129.2	955.3	91,91
80	38.50	44.14	46.48	45.24	43.07	42.07	42.36	39.67	70- 80	75.31	1031	98.2,98.2
90	0.4391	0.4579	0.9809	0.4556	0.2820	0.2964	0.3207	0.3042	80- 90	19.10	1050	100,100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:24.3℃
 Operators:
 Test Date:2024-04-01

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:119.83V I:0.1016A P:11.690W PF:0.9602 Freq:59.98Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1049.73x1 lm		
NAME: VO-RP6W12-120-D-5WAY	TYPE:	WEIGHT:
SPEC.: 5000K 80	DIM.:	SERIAL No.:
MFR.: VOTATEC	SUR.:	Shielding Angle:

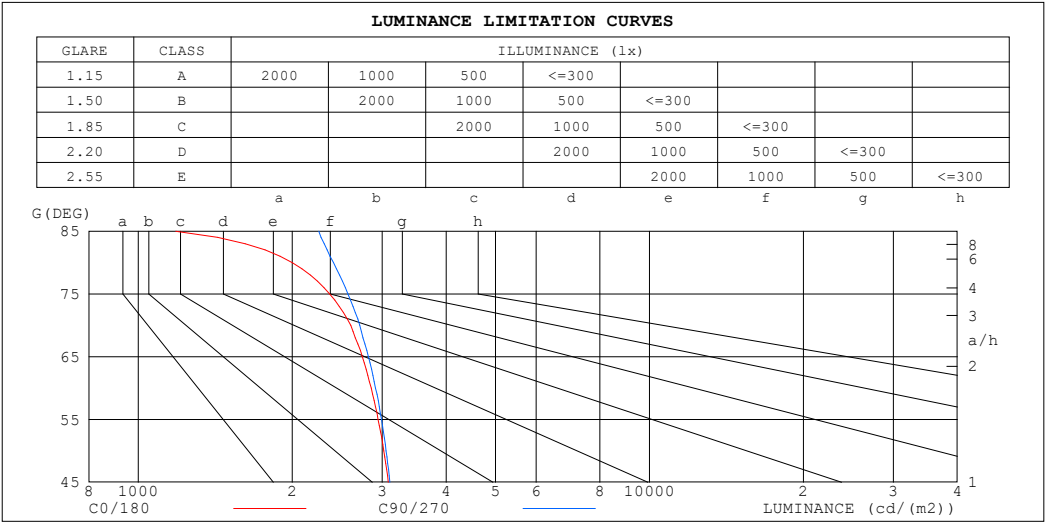


LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	1183	2254
80	1999	2408
75	2368	2570
70	2602	2712
65	2744	2820
60	2854	2911
55	2946	2989
50	3022	3053
45	3084	3107

C Range: 0 - 360DEG	γ Range: 0 - 90DEG
C Interval: 22.5DEG	γ Interval: 1.0DEG
Test Speed: HIGH	Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
Temperature:24.3℃	Humidity:65.0%
Operators:	Test Distance:3.080m [K=1.0000]
Test Date:2024-04-01	Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:119.83V I:0.1016A P:11.690W PF:0.9602 Freq:59.98Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1049.73x1 lm		
NAME: VO-RP6W12-120-D-5WAY	TYPE:	WEIGHT:
SPEC.: 5000K 80	DIM.:	SERIAL No.:
MFR.: VOTATEC	SUR.:	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0														
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0														
pfc	20%			20%			20%			20%			20%			0														
RCR	RCR:Room Cavity Ratio															Coefficients of Utilization(CU)														
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	1.00														
1.0	1.04	.00	.96	1.02	.98	.94	.97	.94	.91	.93	.91	.88	.90	.88	.86	.84														
2.0	.90	.84	.78	.89	.82	.77	.85	.80	.75	.82	.77	.73	.79	.75	.72	.70														
3.0	.79	.71	.65	.78	.70	.64	.75	.68	.63	.72	.66	.62	.69	.65	.61	.58														
4.0	.70	.61	.55	.69	.61	.54	.66	.59	.53	.64	.58	.53	.62	.56	.52	.50														
5.0	.63	.54	.47	.62	.53	.47	.59	.52	.46	.57	.51	.46	.56	.50	.45	.43														
6.0	.56	.47	.41	.56	.47	.41	.54	.46	.40	.52	.45	.40	.50	.44	.40	.38														
7.0	.51	.42	.36	.50	.42	.36	.49	.41	.36	.47	.41	.36	.46	.40	.35	.33														
8.0	.47	.38	.32	.46	.38	.32	.45	.37	.32	.43	.37	.32	.42	.36	.32	.30														
9.0	.43	.35	.29	.42	.34	.29	.41	.34	.29	.40	.33	.29	.39	.33	.28	.27														
10.0	.40	.32	.26	.39	.31	.26	.38	.31	.26	.37	.31	.26	.36	.30	.26	.24														

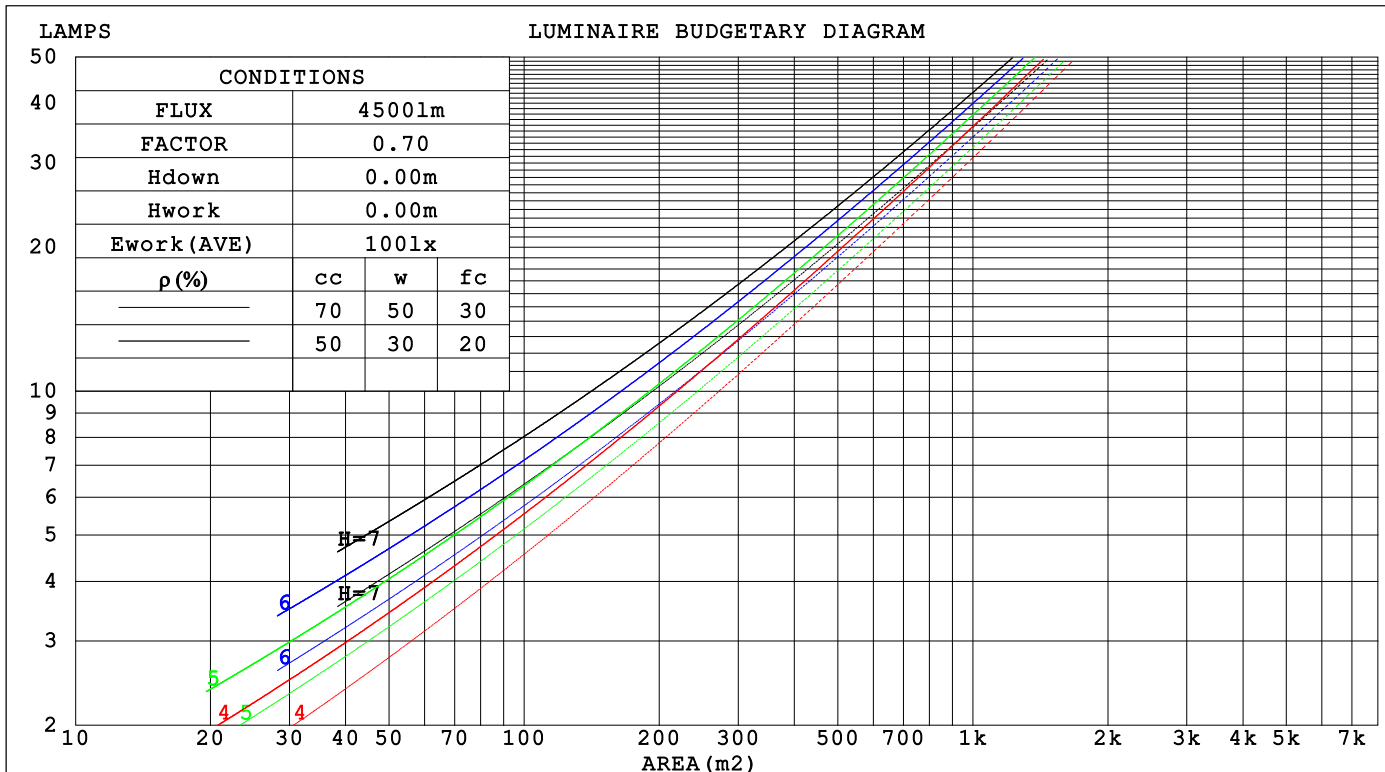

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:24.3℃
Operators:
Test Date:2024-04-01

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
Humidity:65.0%
Test Distance:3.080m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:119.83V I:0.1016A P:11.690W PF:0.9602 Freq:59.98Hz			UTHDi:0.00% ITHDi:0.00% KDisp:0			Lamp Flux:1049.73x1 lm		
NAME: VO-RP6W12-120-D-5WAY			TYPE:			WEIGHT:		
SPEC.: 5000K 80			DIM.:			SERIAL No.:		
MFR.: VOTATEC			SUR.:			Shielding Angle:		

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)										
0.0																	
1.0	.310	.176	.056	.303	.173	.055	.289	.166	.053	.277	.160	.051	.266	.154	.050		
2.0	.292	.160	.049	.286	.157	.048	.274	.152	.047	.263	.148	.046	.253	.143	.045		
3.0	.270	.144	.043	.265	.142	.043	.254	.138	.042	.245	.134	.041	.236	.131	.040		
4.0	.249	.130	.038	.244	.128	.038	.235	.125	.037	.227	.122	.037	.219	.119	.036		
5.0	.230	.117	.034	.226	.116	.034	.218	.113	.033	.210	.111	.033	.203	.109	.033		
6.0	.214	.107	.031	.210	.106	.030	.203	.104	.030	.196	.102	.030	.189	.100	.030		
7.0	.199	.098	.028	.195	.097	.028	.189	.096	.028	.183	.094	.027	.177	.092	.027		
8.0	.186	.091	.026	.183	.090	.025	.177	.088	.025	.171	.087	.025	.166	.085	.025		
9.0	.174	.084	.023	.171	.083	.023	.166	.082	.023	.161	.081	.023	.157	.079	.023		
10.0	.164	.078	.022	.161	.078	.022	.156	.077	.022	.152	.075	.021	.148	.074	.021		

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients (CCEC)										
0.0	.190	.190	.190	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020		
1.0	.180	.156	.134	.154	.134	.116	.106	.092	.080	.061	.053	.047	.019	.017	.015		
2.0	.172	.132	.098	.148	.114	.085	.101	.079	.059	.058	.046	.035	.019	.015	.011		
3.0	.164	.114	.074	.141	.099	.064	.097	.068	.045	.056	.040	.027	.018	.013	.009		
4.0	.157	.101	.058	.135	.087	.051	.093	.061	.036	.054	.036	.021	.017	.012	.007		
5.0	.149	.091	.047	.128	.078	.041	.088	.055	.029	.051	.032	.017	.017	.010	.006		
6.0	.142	.082	.039	.122	.071	.034	.084	.050	.024	.049	.029	.014	.016	.010	.005		
7.0	.135	.075	.033	.116	.065	.029	.080	.046	.021	.047	.027	.012	.015	.009	.004		
8.0	.129	.070	.029	.111	.060	.025	.077	.042	.018	.045	.025	.011	.014	.008	.004		
9.0	.123	.065	.025	.106	.056	.022	.073	.039	.016	.043	.023	.009	.014	.008	.003		
10.0	.117	.060	.022	.101	.052	.020	.070	.037	.014	.041	.022	.008	.013	.007	.003		

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:24.3℃
Operators:
Test Date:2024-04-01

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
Humidity:65.0%
Test Distance:3.080m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:119.83V I:0.1016A P:11.690W PF:0.9602 Freq:59.98Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1049.73x1 lm										
NAME: VO-RP6W12-120-D-5WAY						TYPE:			WEIGHT:	
SPEC.: 5000K 80						DIM.:			SERIAL No.:	
MFR.: VOTATEC						SUR.:			Shielding Angle:	
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	16.5	18.0	16.8	18.2	18.4	16.6	18.1	16.8	18.3	18.5
3H	18.0	19.4	18.3	19.6	19.9	18.1	19.5	18.4	19.8	20.0
4H	18.6	19.9	18.9	20.2	20.4	18.8	20.1	19.1	20.4	20.6
6H	19.0	20.2	19.3	20.5	20.8	19.3	20.5	19.6	20.8	21.1
8H	19.1	20.3	19.4	20.6	20.9	19.4	20.7	19.8	20.9	21.2
12H	19.1	20.3	19.5	20.6	20.9	19.6	20.7	19.9	21.0	21.3
4H 2H	17.1	18.5	17.4	18.7	19.0	17.2	18.5	17.5	18.8	19.0
3H	18.8	20.0	19.2	20.3	20.6	18.9	20.1	19.3	20.4	20.7
4H	19.6	20.6	19.9	20.9	21.3	19.7	20.8	20.1	21.1	21.5
6H	20.1	21.0	20.5	21.4	21.7	20.4	21.3	20.8	21.7	22.0
8H	20.2	21.1	20.6	21.5	21.8	20.6	21.5	21.0	21.8	22.2
12H	20.3	21.1	20.7	21.5	21.9	20.8	21.6	21.2	22.0	22.4
8H 4H	19.8	20.7	20.3	21.1	21.5	20.0	20.9	20.4	21.3	21.6
6H	20.5	21.2	20.9	21.6	22.1	20.8	21.5	21.2	21.9	22.4
8H	20.7	21.4	21.2	21.8	22.3	21.1	21.8	21.6	22.2	22.6
12H	20.8	21.4	21.3	21.8	22.3	21.4	21.9	21.8	22.4	22.9
12H 4H	19.9	20.7	20.3	21.1	21.5	20.0	20.8	20.4	21.2	21.6
6H	20.6	21.2	21.0	21.7	22.1	20.8	21.5	21.3	21.9	22.4
8H	20.8	21.4	21.3	21.8	22.3	21.2	21.8	21.7	22.2	22.7
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 0.2 / - 0.2					+ 0.1 / - 0.2				
1.5H	+ 0.2 / - 0.3					+ 0.2 / - 0.3				
2.0H	+ 0.2 / - 0.3					+ 0.1 / - 0.3				

CIE Pub.117, 1050 lm Total Lamp Luminous Flux Correct (8log(F/F0) = 0.2)
Area: 0.111111 m2

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:24.3℃
Operators:
Test Date:2024-04-01

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
Humidity:65.0%
Test Distance:3.080m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:119.83V I:0.1016A P:11.690W PF:0.9602 Freq:59.98Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1049.73x1 lm		
NAME: VO-RP6W12-120-D-5WAY	TYPE:	WEIGHT:
SPEC.: 5000K 80	DIM.:	SERIAL No.:
MFR.: VOTATEC	SUR.:	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	58	46	39	57	46	39	56	45	39	32
0.80	68	56	49	67	56	48	65	55	48	41
1.00	76	65	58	75	64	57	73	66	57	50
1.25	83	73	65	82	72	65	79	70	64	57
1.50	88	78	71	86	77	71	83	76	70	62
2.00	95	86	80	93	85	79	90	83	78	70
2.50	99	91	85	97	90	84	93	87	82	74
3.00	102	95	90	100	94	89	96	91	87	78
4.00	106	101	96	104	99	95	100	95	92	83
5.00	109	104	100	106	102	98	102	98	95	86
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 24.3°C
Operators:
Test Date: 2024-04-01

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
Humidity: 65.0%
Test Distance: 3.080m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:119.83V I:0.1016A P:11.690W PF:0.9602 Freq:59.98Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1049.73x1 lm		
NAME: VO-RP6W12-120-D-5WAY	TYPE:	WEIGHT:
SPEC.: 5000K 80	DIM.:	SERIAL No.:
MFR.: VOTATEC	SUR.:	Shielding Angle:

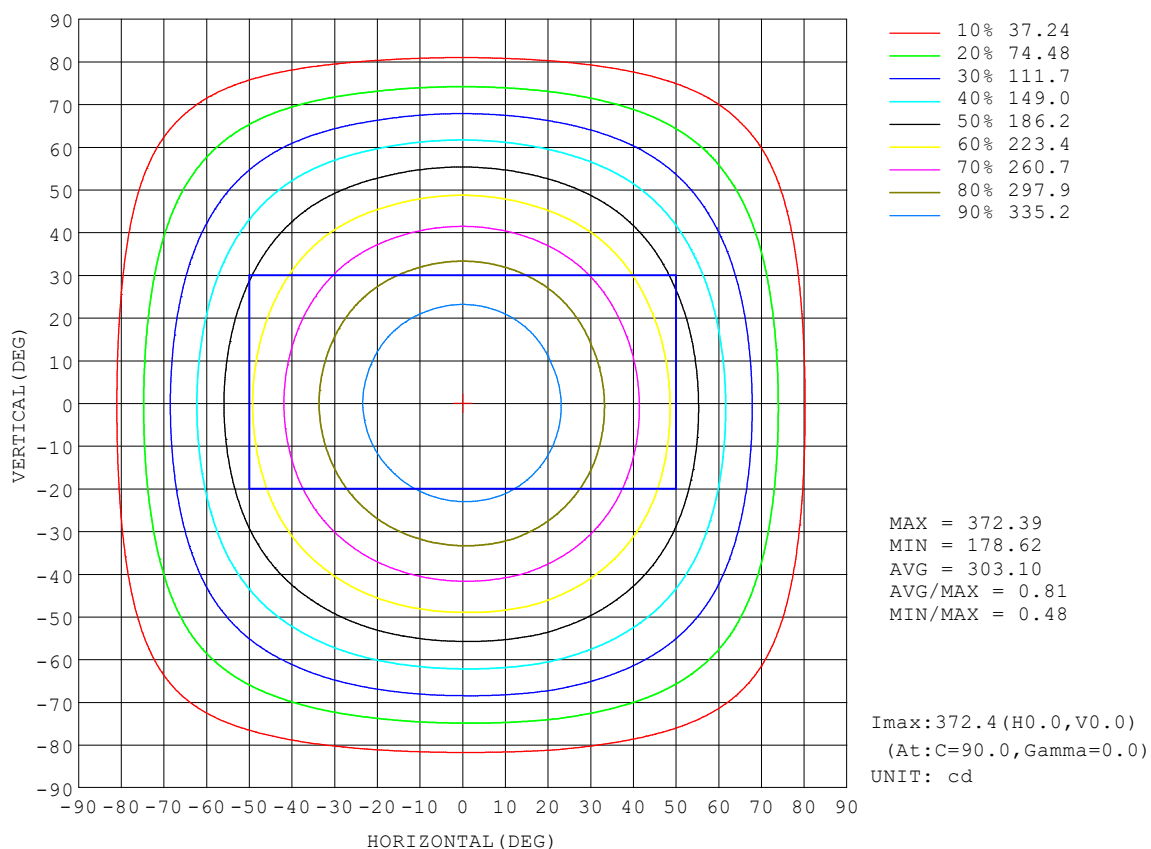


C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 24.3°C
Operators:
Test Date: 2024-04-01

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
Humidity: 65.0%
Test Distance: 3.080m [K=1.0000]
Remarks:

AAI Figure

Test:U:119.83V I:0.1016A P:11.690W PF:0.9602 Freq:59.98Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1049.73x1 lm		
NAME: VO-RP6W12-120-D-5WAY	TYPE:	WEIGHT:
SPEC.: 5000K 80	DIM.:	SERIAL No.:
MFR.: VOTATEC	SUR.:	Shielding Angle:

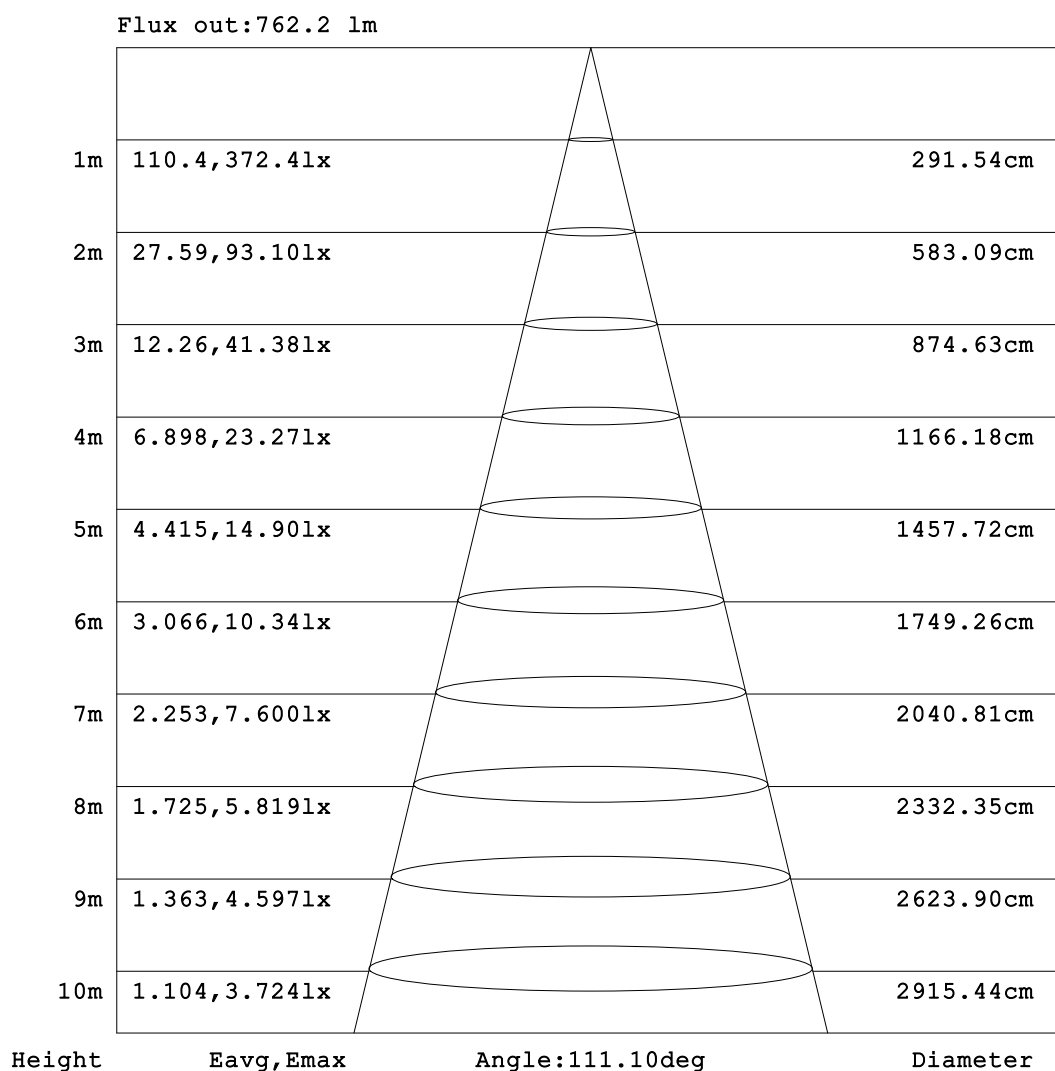


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:24.3℃
Operators:
Test Date:2024-04-01

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
Humidity:65.0%
Test Distance:3.080m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:119.83V I:0.1016A P:11.690W PF:0.9602 Freq:59.98Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1049.73x1 lm		
NAME: VO-RP6W12-120-D-5WAY	TYPE:	WEIGHT:
SPEC.: 5000K 80	DIM.:	SERIAL No.:
MFR.: VOTATEC	SUR.:	Shielding Angle:

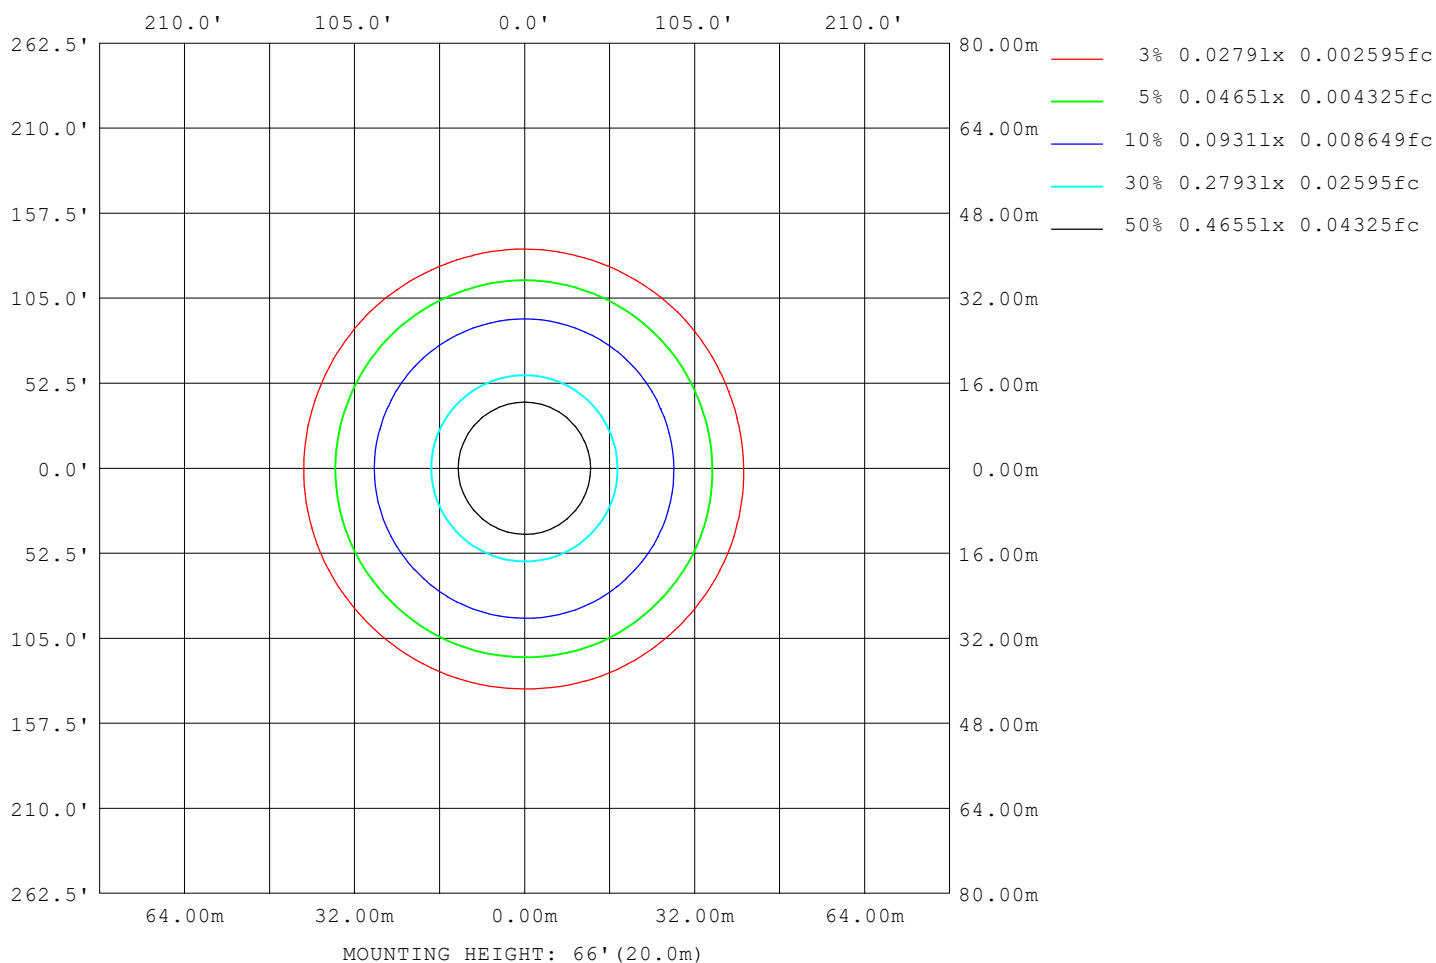

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 24.3°C
Operators:
Test Date: 2024-04-01

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
Humidity: 65.0%
Test Distance: 3.080m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:119.83V I:0.1016A P:11.690W PF:0.9602 Freq:59.98Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1049.73x1 lm		
NAME: VO-RP6W12-120-D-5WAY	TYPE:	WEIGHT:
SPEC.: 5000K 80	DIM.:	SERIAL No.:
MFR.: VOTATEC	SUR.:	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	2781
L_0~180 (75) av	2448
L_0~180 (85) av	1367
L_90~270 (65) av	2784
L_90~270 (75) av	2495
L_90~270 (85) av	2049
L_45 (65) av	2781
L_45 (75) av	2480
L_45 (85) av	1655

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:24.3℃
Operators:
Test Date:2024-04-01

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
Humidity:65.0%
Test Distance:3.080m [K=1.0000]
Remarks:

Planar Illuminance Curve

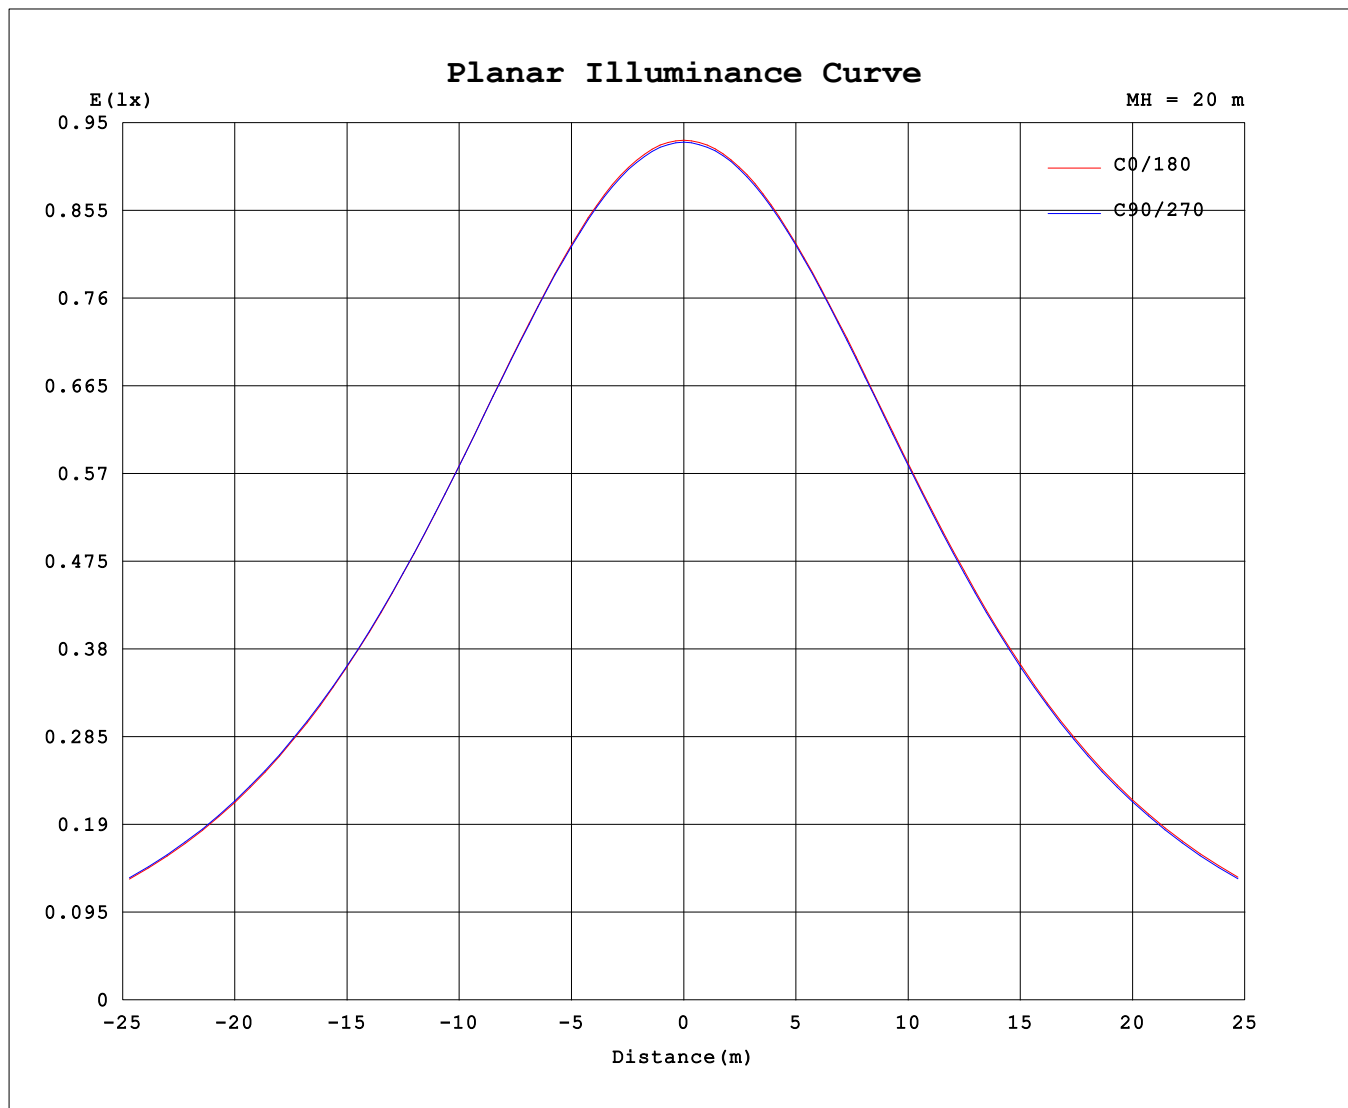

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 24.3 °C
 Operators:
 Test Date: 2024-04-01

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity: 65.0%
 Test Distance: 3.080m [K=1.0000]
 Remarks:

```

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
Humidity:65.0%
Test Distance:3.080m [K=1.0000]
Remarks:

```