


Project : _____

Type : _____

Drawn by : _____

Catalogue No. : _____

Date : _____

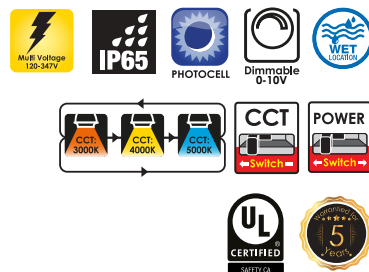

Specifications



Model No.		AST-UDWP01B-30WBS6DC1-BH30/40/50W
General	Watt	30W/20W/10W ADJ
	HID Equivalent	90W
	Lumen	3060L/2040L/1020L
	CCT	3000K/4000K/5000K ADJ
	Volts	AC120-347V
	CRI	>80
	Beam Angel	60°
	Hours Rated	50000hours
Electrical	Operating Frequency	50-60Hz
	Power Factor	>0.9
	Surge Protection	Built-in surge protection-6KV
	Operating Temperature	-40C (-40F) TO 45C (113F)
Physical	Size	10.35"(L)*3.15"(D)
	Lens Material	Glass
	Housing Color	Black
	Weight (Lbs)	2.97
Additional Information	Additional Info	CCT+Power adjustable
	Warranty	5 years
	Safety Listing	cULus-listed
Compliance	Location Rating	Wet
	Energy Star	No
	DLC Approved	No
	DLC ID	No

Features & Specifications

Construction	- Die-casting aluminum material provides optimal heat dissipation. - Up and down lighting, 60°beam angle - CCT and Power adjustable - Default photocell
Mounting	Default wall mount
Performance Data	- Available in 3000K/4000K/5000K selectable 80+ CRI - Electrical ratings: 120-347 VAC - Estimated life of over 100 000 hours to L70 0-10 V dimming driver.
Compliances	- cULus certified for wet locations - IP65

Dimensions & Weights

Model No.	AST-UDWP01B-30WBS6DC1-BH30/40/50W
Size	10.35"(L)*3.15"(D)
Weight (lbs)	2.97

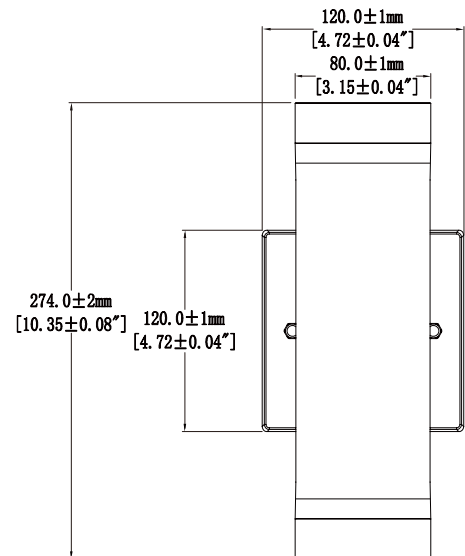

Product Details



Lumen Details

Model No.:	Watt	3000K	4000K	5000K
AST-UDWP01B-30WBS6DC1-BH30/40/50W	30W	2820LM	3150LM	3060LM
	20W	1880LM	2100LM	2040LM
	10W	940LM	1050LM	1020LM



Data is based upon tests performed in a controlled environment. Actual performance can vary depending on operating conditions. All products are subject to change or may be discontinued any time without notice. Please contact your Votatec customer service representative to confirm inventory levels at time of order

