
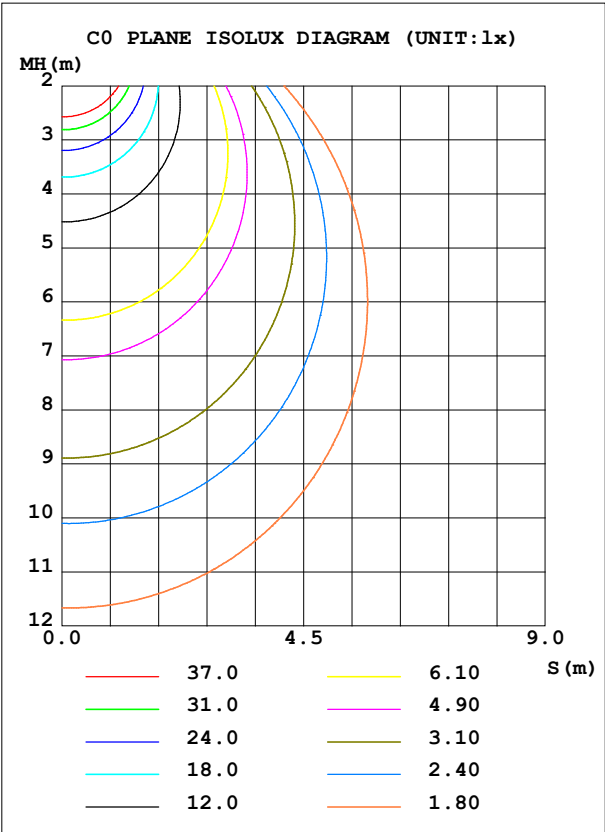


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:120.12V I:0.0888A P:9.7198W PF:0.9109 Freq:59.98Hz Lamp Flux:653.667x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.071	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 67.25 lm/W
MOBIL5-DL04-9W120-5CCT 2700K		Imax (cd)	245.1	S/MH(C0/180)	1.22	
NOMINAL POWER(W)	9W	LOR(%)	100.0	S/MH(C90/270)	1.24	
RATED VOLTAGE(V)	120	TOTAL FLUX(lm)	653.67	η UP,DN(C0-180)	0.1,51.0	
NOMINAL FLUX(lm)	653.667	CIE CLASS	DIRECT	η UP,DN(C180-360)	0.1,48.8	
LAMPS INSIDE	1	η up (%)	0.2	CIBSE SHR NOM	1.25	
TEST VOLTAGE(V)	120	η down (%)	99.8	CIBSE SHR MAX	1.35	

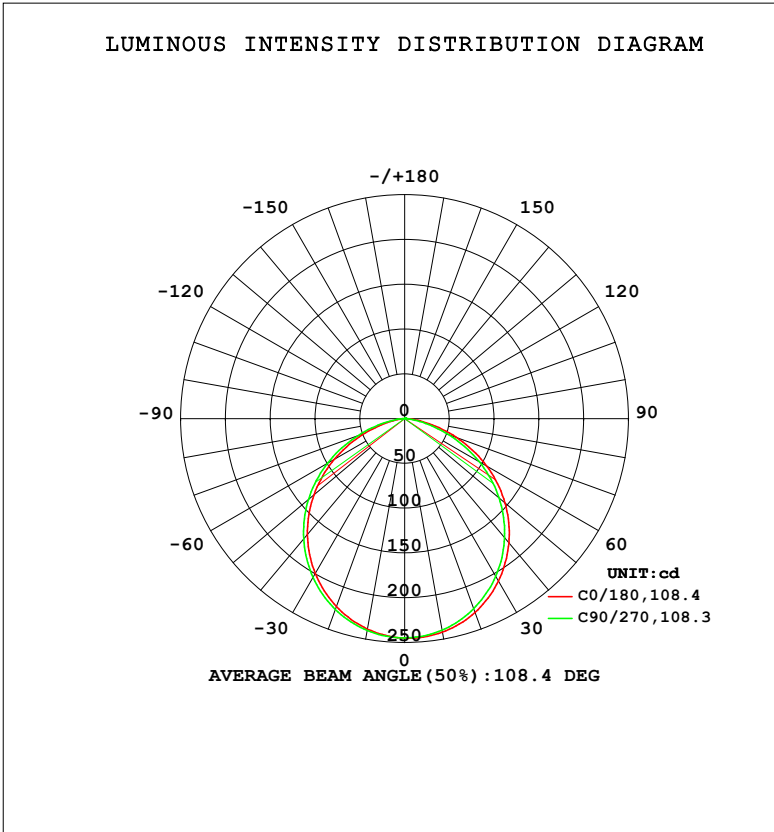

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2024-06-06

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.454
Humidity:65.0%
Test Distance:8.800m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C90	C180	C270					γ	Φ zone	Φ total	%lum, lamp
10	242.1	239.8	238.7	240.2					0- 10	23.15	23.15	3.54,3.54
20	230.1	225.7	223.1	226.6					10- 20	66.13	89.28	13.7,13.7
30	209.3	203.3	199.7	204.7					20- 30	99.64	188.9	28.9,28.9
40	181.2	173.6	169.1	175.4					30- 40	119.0	308.0	47.1,47.1
50	146.4	137.6	132.3	140.1					40- 50	121.5	429.5	65.7,65.7
60	105.8	96.12	90.39	99.41					50- 60	106.3	535.8	82,82
70	61.46	51.88	46.51	55.46					60- 70	75.02	610.8	93.4,93.4
80	21.13	14.26	10.97	16.77					70- 80	35.48	646.3	98.9,98.9
90	0.8137	0	0	0.2175					80- 90	6.098	652.4	99.8,99.8
100	0	0.0000	0.0166	0					90-100	0.0259	652.4	99.8,99.8
110	0	0.0830	0.1161	0.0440					100-110	0.0291	652.5	99.8,99.8
120	0.0993	0.1879	0.2212	0.1490					110-120	0.1107	652.6	99.8,99.8
130	0.1988	0.2818	0.3316	0.2485					120-130	0.1929	652.8	99.9,99.9
140	0.2762	0.3592	0.4092	0.3589					130-140	0.2392	653.0	99.9,99.9
150	0.3590	0.4201	0.5084	0.4310					140-150	0.2458	653.2	99.9,99.9
160	0.4309	0.4973	0.5747	0.5082					150-160	0.2150	653.5	100,100
170	0.5027	0.5526	0.6022	0.5636					160-170	0.1498	653.6	100,100
180	0.5967	0.6022	0.6022	0.5912					170-180	0.0547	653.7	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2024-06-06

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.454
 Humidity:65.0%
 Test Distance:8.800m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:120.12V I:0.0888A P:9.7198W PF:0.9109 Freq:59.98Hz Lamp Flux:653.667x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.071	Shielding Angle:

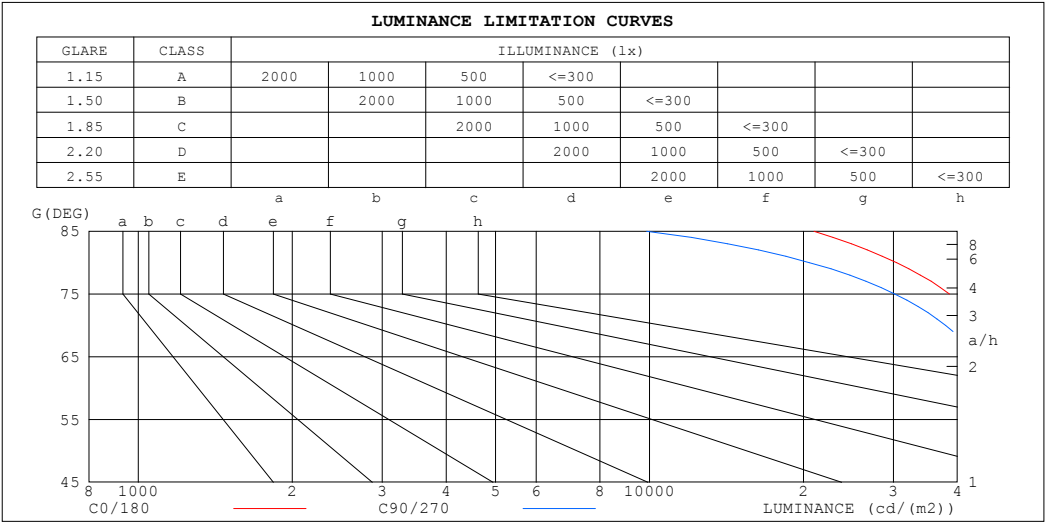


LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	20982	9871
80	30415	20537
75	38586	30164
70	44927	37922
65	49566	43763
60	52878	48062
55	55237	51188
50	56929	53510
45	58159	55279

C Range: 0 - 360DEG	γ Range: 0 - 180DEG
C Interval: 90.0DEG	γ Interval: 1.0DEG
Test Speed: HIGH	Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.454
Temperature:25.3DEG	Humidity:65.0%
Operators:	Test Distance:8.800m [K=1.0000]
Test Date:2024-06-06	Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:120.12V I:0.0888A P:9.7198W PF:0.9109 Freq:59.98Hz		
Lamp Flux:653.667x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.071	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio			Coefficients of Utilization(CU)												
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.05	1.01	.97	1.03	.99	.96	.98	.95	.93	.94	.92	.90	.91	.89	.87	.85
2.0	.92	.85	.80	.90	.84	.79	.86	.81	.77	.83	.79	.75	.80	.77	.74	.71
3.0	.81	.73	.67	.79	.72	.66	.76	.70	.65	.74	.68	.64	.71	.67	.63	.61
4.0	.72	.63	.57	.71	.63	.56	.68	.61	.56	.66	.60	.55	.63	.58	.54	.52
5.0	.64	.55	.49	.63	.55	.49	.61	.54	.48	.59	.53	.48	.57	.52	.47	.45
6.0	.58	.49	.43	.57	.49	.43	.55	.48	.42	.53	.47	.42	.52	.46	.41	.39
7.0	.53	.44	.38	.52	.44	.38	.50	.43	.37	.49	.42	.37	.47	.41	.37	.35
8.0	.48	.40	.34	.47	.39	.34	.46	.39	.33	.45	.38	.33	.44	.38	.33	.31
9.0	.44	.36	.30	.43	.36	.30	.42	.35	.30	.41	.35	.30	.40	.34	.30	.28
10.0	.41	.33	.28	.40	.33	.28	.39	.32	.27	.38	.32	.27	.37	.31	.27	.25

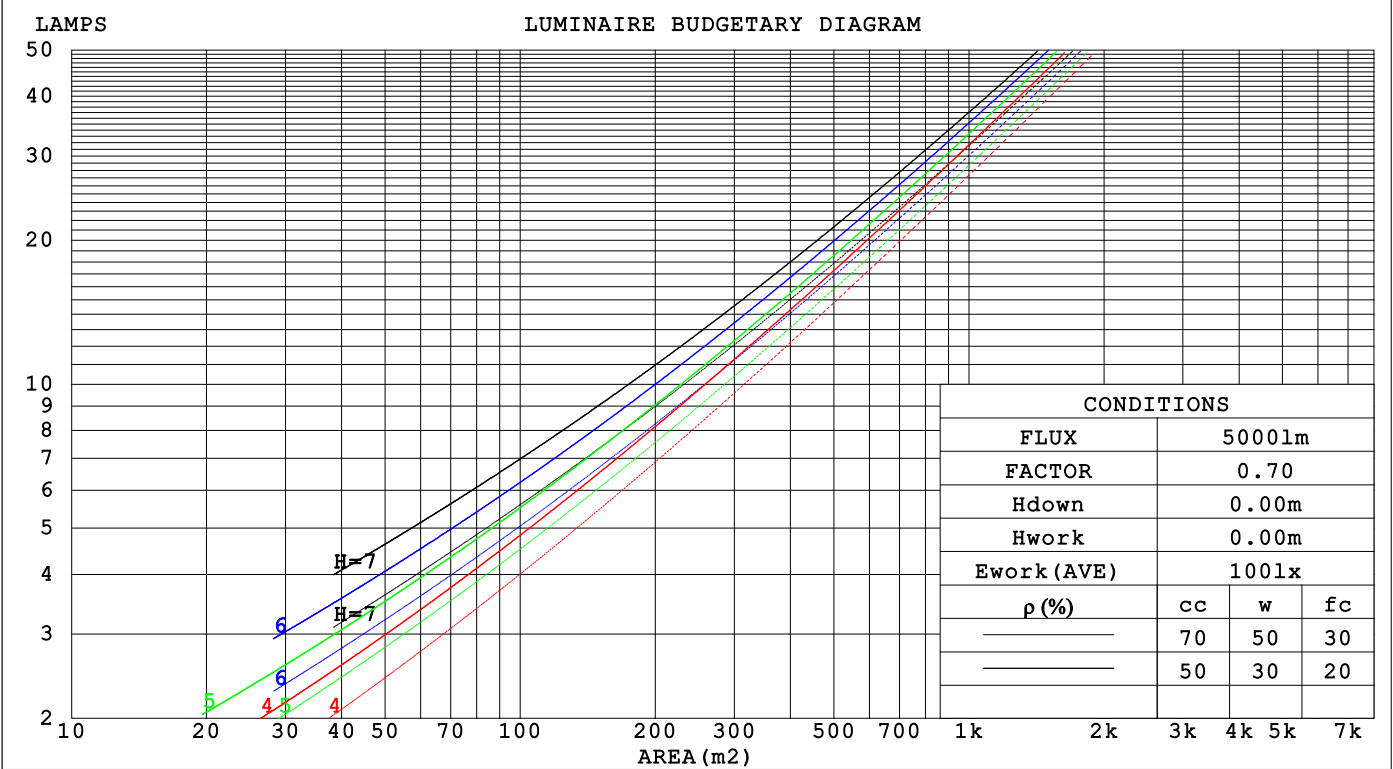

C Range: 0 - 360DEG

C Interval: 90.0DEG

Test Speed: HIGH

Temperature:25.3DEG

Operators:

Test Date:2024-06-06

γ Range: 0 - 180DEG

γ Interval: 1.0DEG

Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.454

Humidity:65.0%

Test Distance:8.800m [K=1.0000]

Remarks:

WEC AND CCEC

Test:U:120.12V I:0.0888A P:9.7198W PF:0.9109 Freq:59.98Hz Lamp Flux:653.667x1 lm					
NAME:		TYPE:		WEIGHT:	
SPEC.:		DIM.:		SERIAL No.:	
MFR.:		SUR.: 0.071		Shielding Angle:	

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)										
0.0																	
1.0	.289	.165	.052	.282	.161	.051	.269	.154	.049	.257	.148	.048	.246	.142	.046		
2.0	.277	.152	.047	.271	.149	.046	.260	.144	.045	.249	.140	.044	.239	.135	.043		
3.0	.260	.138	.041	.254	.136	.041	.244	.132	.040	.234	.128	.039	.225	.125	.039		
4.0	.241	.125	.037	.236	.124	.037	.227	.121	.036	.219	.117	.035	.211	.115	.035		
5.0	.224	.114	.033	.220	.113	.033	.212	.110	.032	.204	.108	.032	.197	.105	.032		
6.0	.209	.105	.030	.205	.104	.030	.198	.101	.029	.191	.099	.029	.185	.097	.029		
7.0	.195	.096	.027	.191	.095	.027	.185	.094	.027	.179	.092	.027	.173	.090	.026		
8.0	.182	.089	.025	.179	.088	.025	.174	.087	.025	.168	.085	.025	.163	.084	.024		
9.0	.171	.083	.023	.169	.082	.023	.163	.081	.023	.158	.079	.023	.154	.078	.023		
10.0	.161	.077	.021	.159	.077	.021	.154	.076	.021	.150	.074	.021	.146	.073	.021		

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients (CCEC)									
0.0	.192	.192	.192	.164	.164	.164	.112	.112	.112	.064	.064	.064	.021	.021	.021	
1.0	.180	.158	.137	.154	.135	.118	.106	.093	.082	.061	.054	.048	.019	.017	.015	
2.0	.172	.133	.101	.147	.115	.088	.101	.079	.061	.058	.046	.036	.019	.015	.012	
3.0	.164	.116	.077	.141	.100	.067	.097	.069	.047	.056	.041	.028	.018	.013	.009	
4.0	.156	.102	.061	.134	.088	.053	.092	.062	.037	.053	.036	.022	.017	.012	.007	
5.0	.149	.092	.050	.128	.079	.043	.088	.056	.030	.051	.033	.018	.016	.011	.006	
6.0	.142	.083	.041	.122	.072	.036	.084	.051	.025	.049	.030	.015	.016	.010	.005	
7.0	.135	.077	.035	.117	.066	.031	.081	.047	.022	.047	.027	.013	.015	.009	.004	
8.0	.129	.071	.031	.111	.061	.027	.077	.043	.019	.045	.025	.011	.014	.008	.004	
9.0	.123	.066	.027	.106	.057	.024	.074	.040	.017	.043	.024	.010	.014	.008	.003	
10.0	.118	.062	.024	.101	.053	.021	.070	.038	.015	.041	.022	.009	.013	.007	.003	

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2024-06-06

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.454
Humidity:65.0%
Test Distance:8.800m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:120.12V I:0.0888A P:9.7198W PF:0.9109 Freq:59.98Hz Lamp Flux:653.667x1 lm										
NAME:			TYPE:			WEIGHT:				
SPEC.:			DIM.:			SERIAL No.:				
MFR.:			SUR.: 0.071			Shielding Angle:				
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	28.4	29.9	28.6	30.1	30.3	28.1	29.5	28.3	29.7	29.9
3H	29.7	31.1	30.0	31.3	31.6	29.2	30.6	29.5	30.8	31.1
4H	30.2	31.5	30.5	31.7	32.0	29.6	30.9	29.9	31.1	31.4
6H	30.5	31.7	30.8	32.0	32.2	29.7	31.0	30.1	31.2	31.5
8H	30.5	31.7	30.9	32.0	32.3	29.8	30.9	30.1	31.2	31.5
12H	30.5	31.7	30.9	32.0	32.3	29.7	30.9	30.1	31.1	31.5
4H 2H	28.9	30.2	29.2	30.4	30.7	28.6	29.9	28.9	30.2	30.4
3H	30.4	31.5	30.8	31.8	32.1	30.0	31.1	30.3	31.4	31.7
4H	31.0	32.0	31.3	32.3	32.7	30.4	31.5	30.8	31.8	32.1
6H	31.3	32.2	31.7	32.6	33.0	30.7	31.6	31.1	31.9	32.3
8H	31.4	32.3	31.8	32.6	33.0	30.7	31.5	31.1	31.9	32.3
12H	31.5	32.2	31.9	32.6	33.0	30.7	31.5	31.1	31.9	32.3
8H 4H	31.1	32.0	31.5	32.3	32.7	30.6	31.5	31.0	31.8	32.2
6H	31.6	32.3	32.0	32.7	33.1	30.9	31.6	31.4	32.1	32.5
8H	31.7	32.3	32.2	32.8	33.2	31.0	31.6	31.5	32.1	32.5
12H	31.8	32.3	32.3	32.8	33.2	31.0	31.6	31.5	32.0	32.5
12H 4H	31.1	31.9	31.5	32.3	32.7	30.6	31.4	31.0	31.8	32.2
6H	31.6	32.2	32.0	32.6	33.1	31.0	31.6	31.4	32.0	32.5
8H	31.7	32.3	32.2	32.7	33.2	31.1	31.6	31.5	32.0	32.5
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 0.2 / - 0.2					+ 0.2 / - 0.3				
1.5H	+ 0.2 / - 0.3					+ 0.2 / - 0.4				
2.0H	+ 0.3 / - 0.3					+ 0.3 / - 0.4				

CIE Pub.117, 653.7 lm Total Lamp Luminous Flux Correct (8log(F/F0) = -1.5)
Area: 0.004 m2

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2024-06-06

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.454
Humidity:65.0%
Test Distance:8.800m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:120.12V I:0.0888A P:9.7198W PF:0.9109 Freq:59.98Hz Lamp Flux:653.667x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.071	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	59	47	41	58	47	40	57	47	40	34
0.80	69	58	50	68	57	50	66	56	50	43
1.00	78	67	60	76	66	59	74	67	59	52
1.25	85	75	68	83	74	67	81	72	66	59
1.50	90	80	73	88	79	73	85	77	72	65
2.00	96	88	82	94	87	81	91	85	80	72
2.50	100	93	87	98	91	86	94	89	84	76
3.00	103	97	92	101	95	91	97	92	88	80
4.00	107	102	97	105	100	96	101	97	93	85
5.00	109	105	101	107	103	99	102	99	96	87
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2024-06-06

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.454
 Humidity: 65.0%
 Test Distance: 8.800m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:120.12V I:0.0888A P:9.7198W PF:0.9109 Freq:59.98Hz Lamp Flux:653.667x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.071	Shielding Angle:

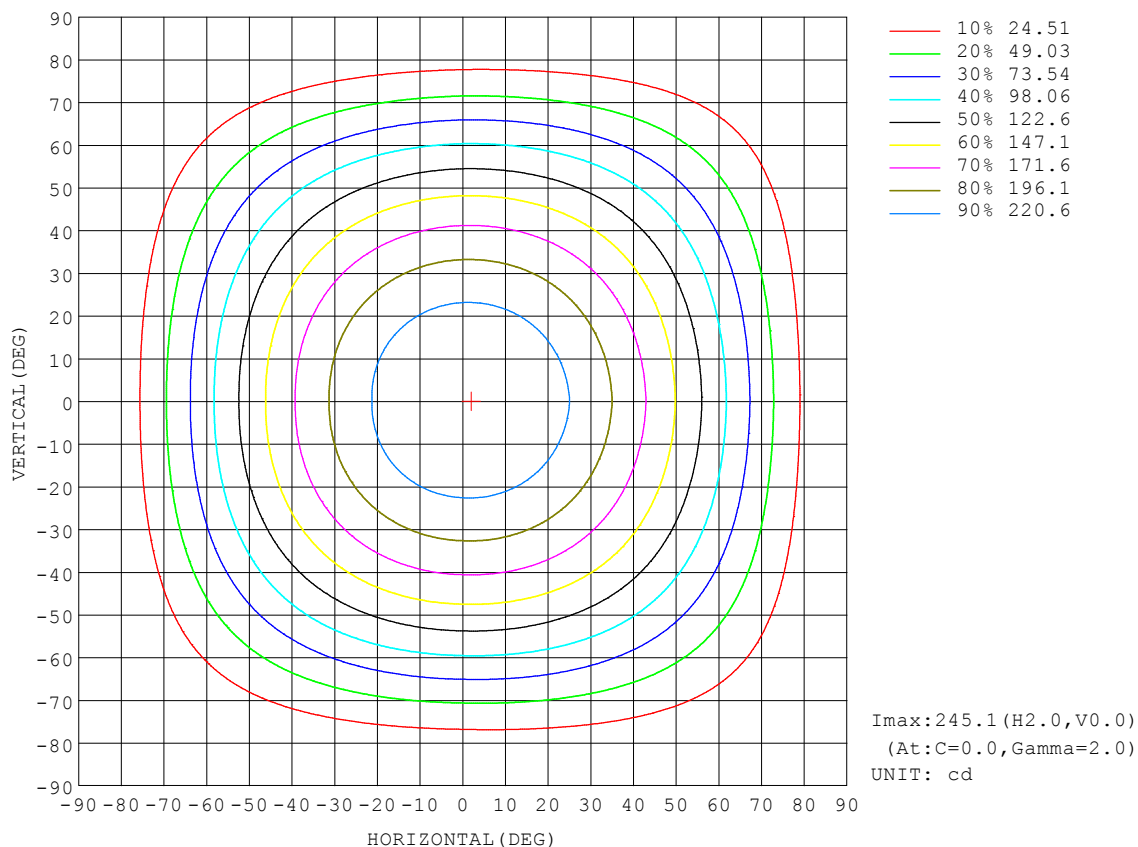


C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2024-06-06

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.454
Humidity:65.0%
Test Distance:8.800m [K=1.0000]
Remarks:

AAI Figure

Test:U:120.12V I:0.0888A P:9.7198W PF:0.9109 Freq:59.98Hz Lamp Flux:653.667x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.071	Shielding Angle:

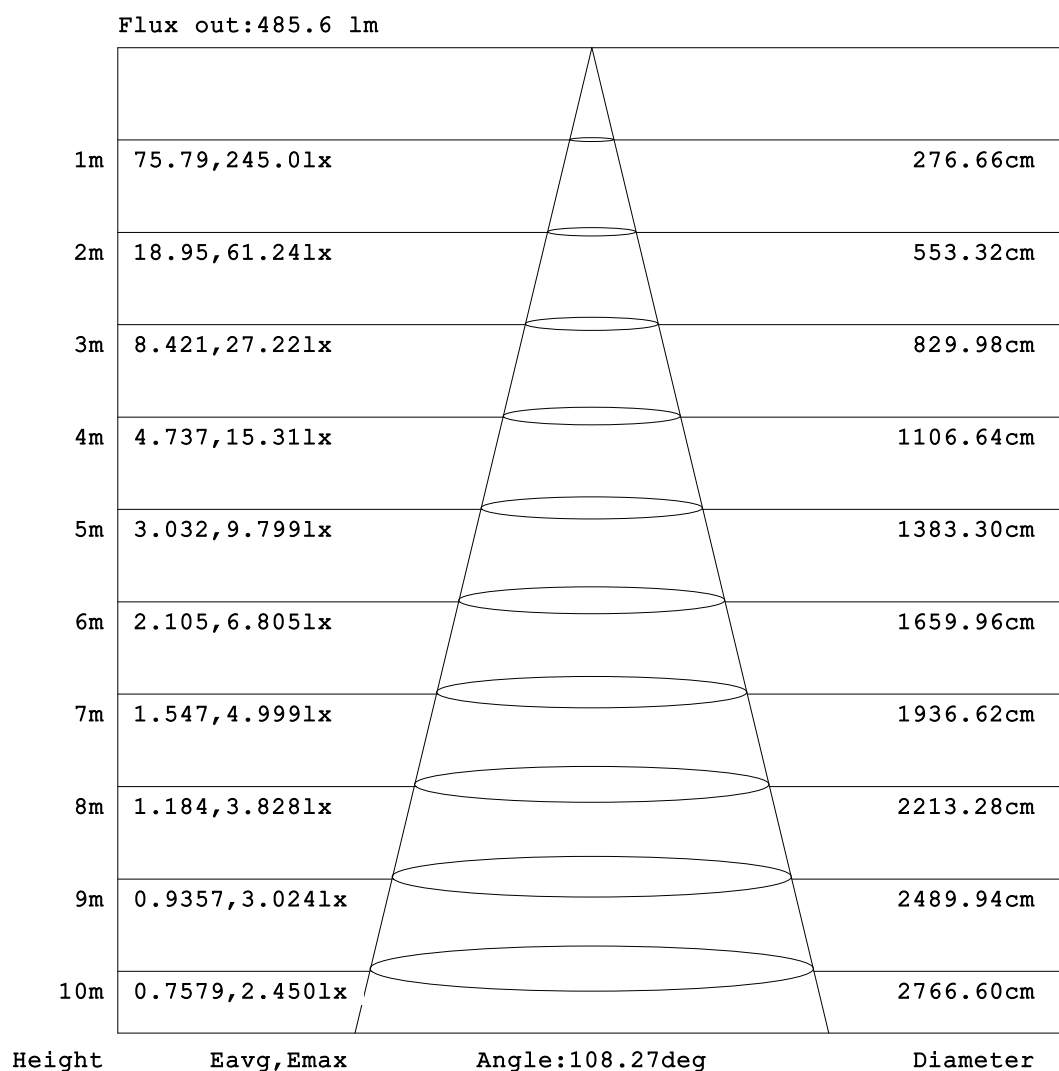


C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2024-06-06

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.454
 Humidity:65.0%
 Test Distance:8.800m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

Test:U:120.12V I:0.0888A P:9.7198W PF:0.9109 Freq:59.98Hz Lamp Flux:653.667x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.071	Shielding Angle:

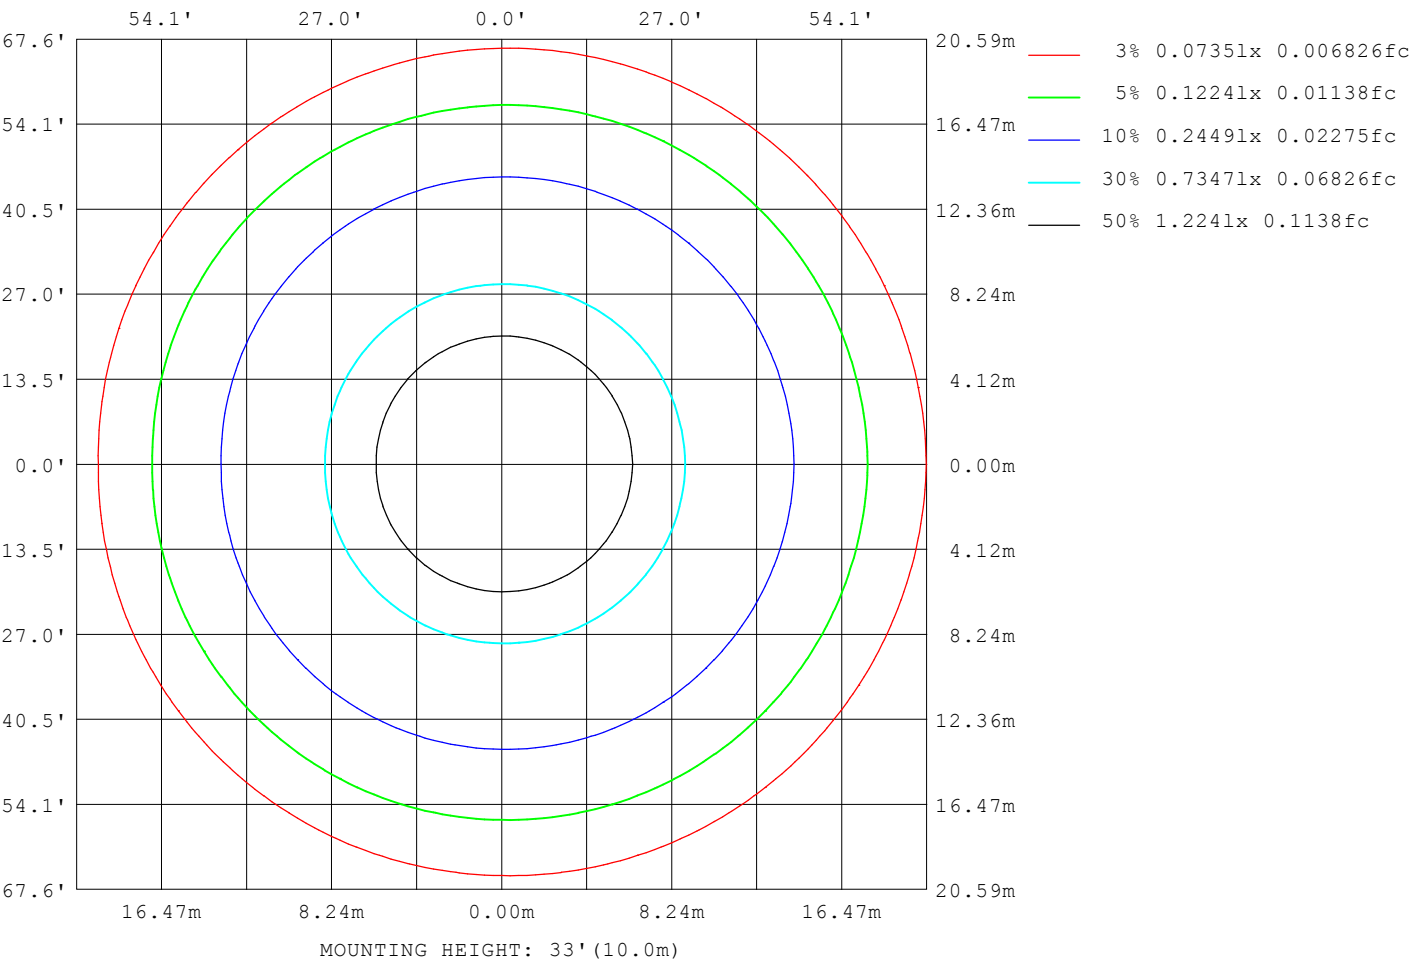

C Range: 0 - 360DEG	γ Range: 0 - 180DEG
C Interval: 90.0DEG	γ Interval: 1.0DEG
Test Speed: HIGH	Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.454
Temperature:25.3DEG	Humidity:65.0%
Operators:	Test Distance:8.800m [K=1.0000]
Test Date:2024-06-06	Remarks:

LED Avg.L Report

Test:U:120.12V I:0.0888A P:9.7198W PF:0.9109 Freq:59.98Hz Lamp Flux:653.667x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.071	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	44981
L_0~180 (75) av	32167
L_0~180 (85) av	13178
L_90~270 (65) av	44813
L_90~270 (75) av	31775
L_90~270 (85) av	11546
L_45 (65) av	44589
L_45 (75) av	31521
L_45 (85) av	11670

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2024-06-06

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.454
Humidity:65.0%
Test Distance:8.800m [K=1.0000]
Remarks:

Planar Illuminance Curve

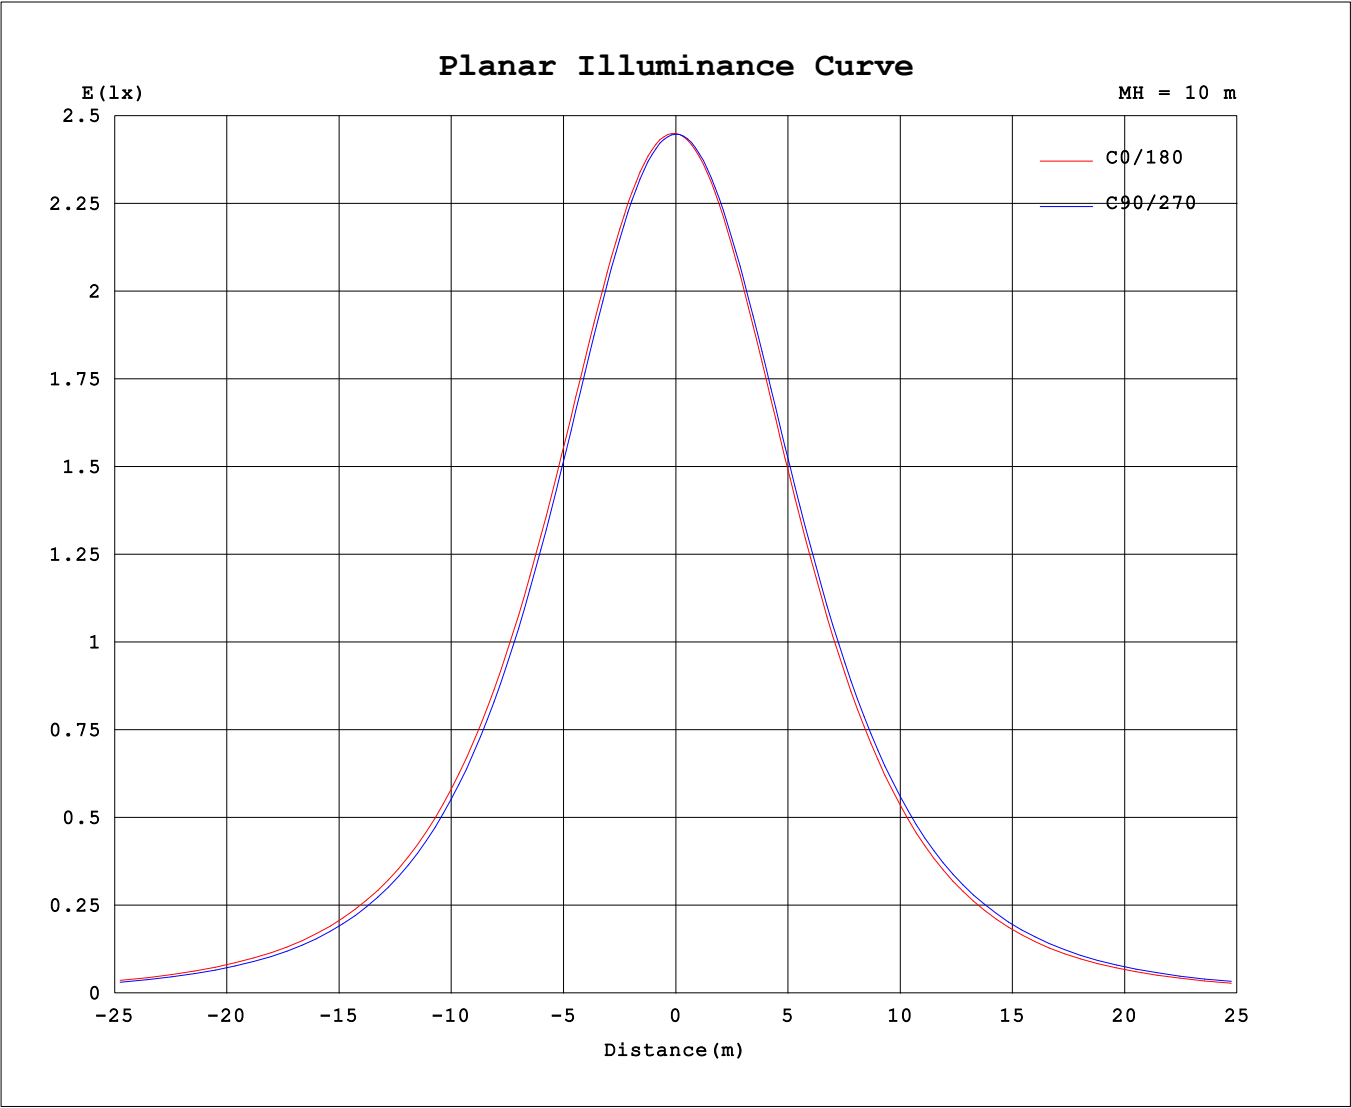

C Range: 0 - 360DEG	γ Range: 0 - 180DEG
C Interval: 90.0DEG	γ Interval: 1.0DEG
Test Speed: HIGH	Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.454
Temperature:25.3DEG	Humidity:65.0%
Operators:	Test Distance:8.800m [K=1.0000]
Test Date:2024-06-06	Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.12V I:0.0888A P:9.7198W PF:0.9109 Freq:59.98Hz Lamp Flux:653.667x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.: 0.071	Shielding Angle:

Table--1

UNIT: cd

C (DEG) γ (DEG)	0	90	180	270														
0	245	245	245	245														
5	245	243	243	244														
10	242	240	239	240														
15	237	234	232	235														
20	230	226	223	227														
25	221	215	212	217														
30	209	203	200	205														
35	196	189	185	191														
40	181	174	169	175														
45	164	156	151	158														
50	146	138	132	140														
55	127	117	112	120														
60	106	96.1	90.4	99.4														
65	83.8	74.0	68.3	77.5														
70	61.5	51.9	46.5	55.5														
75	39.9	31.2	26.7	34.6														
80	21.1	14.3	11.0	16.8														
85	7.31	3.44	1.87	4.61														
90	0.81	0.00	0.00	0.22														
95	0.00	0.00	0.00	0.00														
100	0.00	0.00	0.02	0.00														
105	0.00	0.04	0.06	0.00														
110	0.00	0.08	0.12	0.04														
115	0.05	0.13	0.17	0.09														
120	0.10	0.19	0.22	0.15														
125	0.15	0.23	0.28	0.21														
130	0.20	0.28	0.33	0.25														
135	0.24	0.33	0.38	0.31														
140	0.28	0.36	0.41	0.36														
145	0.32	0.39	0.46	0.39														
150	0.36	0.42	0.51	0.43														
155	0.39	0.46	0.54	0.47														
160	0.43	0.50	0.57	0.51														
165	0.47	0.52	0.60	0.54														
170	0.50	0.55	0.60	0.56														
175	0.55	0.60	0.60	0.59														
180	0.60	0.60	0.60	0.59														

C Range: 0 - 360DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2024-06-06

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
γ Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.454
Humidity:65.0%
Test Distance:8.800m [K=1.0000]
Remarks:

Photometric Data Table [cd]

G/C	0.0	90.0	180.0	270.0
0.0	244.9	244.8	244.9	244.8
3.0	245.1	244.3	244.1	244.4
6.0	244.4	243.0	242.3	243.2
9.0	242.8	240.8	239.7	241.1
12.0	240.4	237.8	236.2	238.1
15.0	237.3	233.9	231.9	234.5
18.0	233.2	229.3	226.9	230.1
21.0	228.4	223.8	221.2	224.8
24.0	222.8	217.7	214.6	218.8
27.0	216.5	210.9	207.4	212.1
30.0	209.3	203.3	199.7	204.7
33.0	201.6	195.1	191.3	196.6
36.0	193.3	186.4	182.1	187.9
39.0	184.3	176.9	172.4	178.6
42.0	174.7	166.9	162.2	168.8
45.0	164.5	156.4	151.4	158.5
48.0	153.8	145.2	140.1	147.6
51.0	142.5	133.7	128.4	136.3
54.0	130.8	121.6	116.1	124.4
57.0	118.4	109.1	103.4	112.1
60.0	105.8	96.12	90.39	99.41
63.0	92.64	82.90	77.13	86.38
66.0	79.26	69.51	63.86	73.07
69.0	65.92	56.27	50.80	59.88
72.0	52.66	43.34	38.23	46.90
75.0	39.95	31.23	26.66	34.56
78.0	28.18	20.49	16.64	23.37
81.0	17.85	11.57	8.551	13.79
84.0	9.557	5.051	3.019	6.475
87.0	3.759	1.305	0.4556	1.834
90.0	0.8137	0	0	0.2175
93.0	0.0001	0	0	0
96.0	0	0	0	0
99.0	0	0	0.0111	0
102.0	0	0.0111	0.0333	0
105.0	0	0.0443	0.0609	0
108.0	0	0.0664	0.0886	0.0165
111.0	0.0218	0.0941	0.1217	0.0442
114.0	0.0386	0.1271	0.1604	0.0773
117.0	0.0717	0.1548	0.1881	0.1213
120.0	0.0993	0.1879	0.2212	0.1490
123.0	0.1380	0.2210	0.2598	0.1768
126.0	0.1546	0.2487	0.2874	0.2045
129.0	0.1932	0.2708	0.3151	0.2375
132.0	0.2099	0.2929	0.3537	0.2762
135.0	0.2430	0.3260	0.3813	0.3093
138.0	0.2706	0.3426	0.4089	0.3369
141.0	0.2872	0.3647	0.4366	0.3646
144.0	0.3093	0.3813	0.4586	0.3922
147.0	0.3314	0.4034	0.4863	0.4088
150.0	0.3590	0.4201	0.5084	0.4310
153.0	0.3702	0.4531	0.5306	0.4585
156.0	0.3977	0.4642	0.5472	0.4751
159.0	0.4254	0.4863	0.5746	0.4972
162.0	0.4419	0.5138	0.5859	0.5138
165.0	0.4750	0.5194	0.6022	0.5359
168.0	0.4861	0.5415	0.6022	0.5524
171.0	0.5192	0.5636	0.6022	0.5745
174.0	0.5413	0.5803	0.6022	0.5801
177.0	0.5634	0.6022	0.6022	0.5911
180.0	0.5967	0.6022	0.6022	0.5912

C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2024-06-06

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.454
 Humidity: 65.0%
 Test Distance: 8.800m [K=1.0000]
 Remarks: