

Project : \_\_\_\_\_  
 Type : \_\_\_\_\_  
 Drawn by: \_\_\_\_\_  
 Catalogue No. : \_\_\_\_\_  
 Date : \_\_\_\_\_



## Specifications

Model No.		<input type="checkbox"/> WP10-120M-PSC-3CCT
General	Watts	120W/100W/80W/60W Adjustable
	Lumen	15247lm/13097lm/10995lm/9018lm
	CCT	3000K/4000K/5000K ADJ
	Volts	120-347V
	CRI	>70
	Beam Angel	T3 (40°)
	Hours Rated	50,000 hours
Electrical	Operating Frequency	50-60Hz
	Power Factor	≥0.9
	Surge Protection	Built-in surge protection-6KV
	Operating Temperature	-30°C (-22°F) TO 45°C (113°F)
Physical	LED Type	3030
	LED QTY	140PCS
	Housing	Die Casting Aluminum
	Lens Material	Plastic
	Housing Color	Bronze
	Weight (Kg)	3.5
Additional Information	Ik rating	IK08
	Function	Built-in Photocell
	Additional Info	CCT+Power adjustable
	Rated For Enclosed Fixture	Yes
Compliance	Warranty	5 years
	Safety Listing	ETL/cETL/DLC
	Location Rating	Wet
	DLC Approved	Yes, DLC Premium 5.1
	DLC ID	PM8SY6JI

## Features & Specifications

### Construction

- Die-casting aluminum material provides optimal heat dissipation.
- Standard T3 wide beam angle
- CCT and Power adjustable
- Built-in Photocell

### Mounting

- Wall Mount

### Performance Data



- Available in 3000K/4000K/5000K selectable 70+ CRI
- Electrical ratings: 120-347 VAC
- Estimated life of over 50,000 hours to L70
- 0-10 V dimming driver.

### Compliances


- cETL certified for wet locations
- IP65
- DLC Premium 5.1

## Dimensions & Weights

Model No.	WP10-120M-PSC-3CCT
Length in.(cm)	9.21 inch (23.38)
Width in.(cm)	11.05 inch (28.04)
Height in.(cm)	7.22 inch (18.33)
Net weight Kgs.(lbs)	3.5 kgs (7.72)

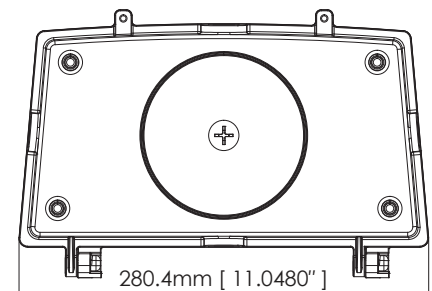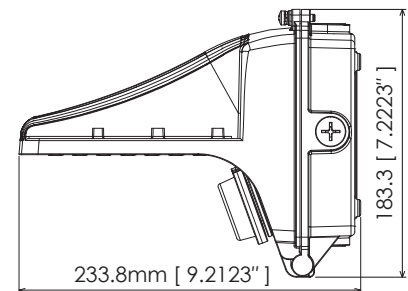

**Product Details**

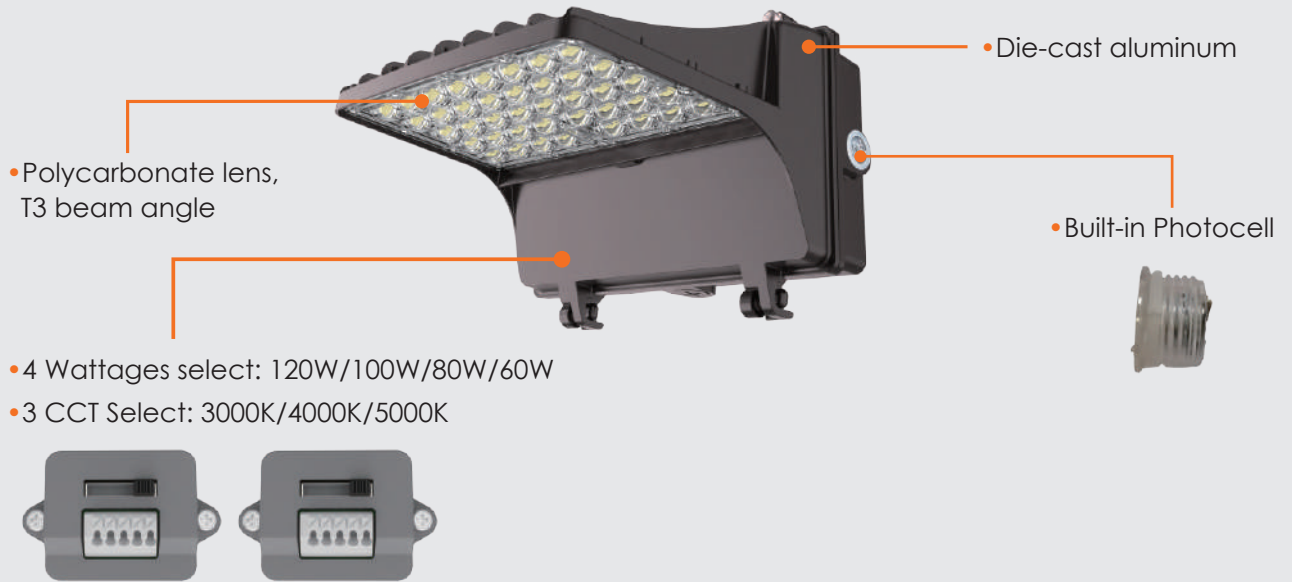

**Lumen Details**

Model No.:	Watt	3000K	4000K	5000K
WP10-120M-PSC-3CCT	120W	14888LM	16463LM	15247LM
	100W	12737LM	13861LM	13097LM
	80W	10671LM	11447LM	10995LM
	60W	8793LM	9260LM	9018LM



Data is based upon tests performed in a controlled environment. Actual performance can vary depending on operating conditions. All products are subject to change or may be discontinued any time without notice. Please contact your Votatec customer service representative to confirm inventory levels at time of order

