

Project : _____
 Type : _____
 Drawn by : _____
 Catalogue No. : _____
 Date : _____



JXL-ST07-5CCT



JXL-ST12-5CCT

Specifications

	Model No.	□ JXL-ST07-5CCT	□ JXL-ST12-5CCT
General	Watts	4.5W	7W
	Length	7"	12"
	Lumen	310LM	450LM
	CCT	2700K/3000K/3500K/4000K/5000K	2700K/3000K/3500K/4000K/5000K
	Volts	AC/DC12-24V	AC/DC12-24V
	CRI	>82Ra	>82Ra
	Beam Angle	95°	95°
	Hours Rated	40,000 Hours	40,000 Hours
	Electrical	Power Factor	>0.9
Operating Temperature		-20°C~40°C / -4°F~104°F	-20°C~40°C / -4°F~104°F
Physical	Lens Material	anti UV PC	anti UV PC
	Housing Color	Brown	Brown
	Weight (LBS)	0.72	1.1
Additional Information	Additional Info	5 Way CCT	5 Way CCT
	Warranty	3 Years	3 Years
Compliance	Safety Listing	CETL Listed	CETL Listed
	Location Rating	Wet	Wet
	Energy Star	No	No
	DLC Approved	No	No
	DLC ID	No	No

Features & Specifications

Construction

- Detachable die cast aluminum light
- Stainless steel mounting plate

Mounting

- Rotated 270° up and down
- Two way installation available . install as a rotatable hardscape light or a deck light.

Performance Data



- 2700K/3000K/3500K/4000K/5000K 5CCT selectable
- 12V-24V AC/DC low voltage compatible
- CRI > 82
- 40,000 hours lifespan
- Memory function
- Working temperature range of -4°F-104°F/-20°C~40°C

Compliances

- CETL listed
- IP65 waterproof

Dimensions & Weights


Model	JXL-ST07-5CCT	JXL-ST12-5CCT
Width in. (mm)	6.81"(173mm)	11.81"(300mm)
Depth in. (mm)	2.91"(74mm)	2.91"(74mm)
Height in. (mm)	0.9"(23mm)	0.9"(23mm)
Net weight (lbs)	0.72	1.1

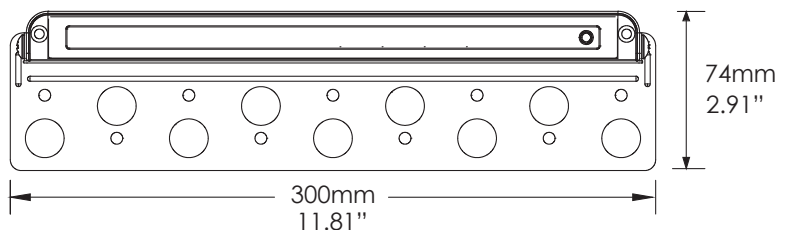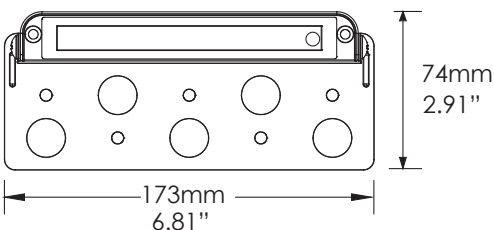

JXL-ST07-5CCT


JXL-ST12-5CCT

Product Details

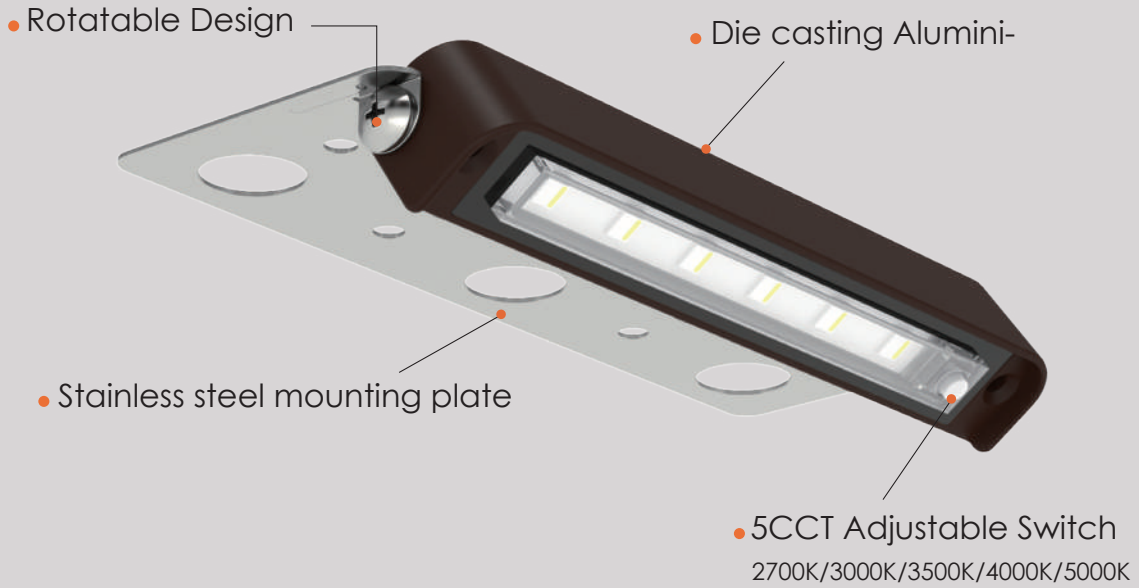

Lumen Details

Model No.:	Watts (W)	2700K		3000K		3500K		4000K		5000K	
		Lumen Output (LM)	Efficiency (LM/W)	Lumen Output (LM)	Efficiency (LM/W)	Lumen Output (LM)	Efficiency (LM/W)	Lumen Output (LM)	Efficiency (LM/W)	Lumen Output (LM)	Efficiency (LM/W)
JXL-ST07-5CCT	4.5W	299LM	70	309LM	74	325LM	78	332LM	80	346LM	84
JXL-ST12-5CCT	7W	384LM	60	398LM	63	418LM	67	427LM	68	443LM	71



Data is based upon tests performed in a controlled environment. Actual performance can vary depending on operating conditions. All products are subject to change or may be discontinued any time without notice. Please contact your Votatec customer service representative to confirm inventory levels at time of order

