



Project : \_\_\_\_\_

Type : \_\_\_\_\_

Drawn by : \_\_\_\_\_

Catalogue No. : \_\_\_\_\_

Date : \_\_\_\_\_



VO-FST64W6.5-26



VO-FST64-WH-W6.5-26  
(White Filament)

### Specifications

Model No.		<input type="checkbox"/> VO-FST64W6.5-26	<input type="checkbox"/> VO-FST64-WH-W6.5-26
General	CCT	<input type="checkbox"/> 3000K <input type="checkbox"/> 4000K <input type="checkbox"/> 5000K	<input type="checkbox"/> 3000K <input type="checkbox"/> 4000K <input type="checkbox"/> 5000K
	Watts	6.5W	6.5W
	Lumen	700Lm	700Lm
	Base	E26	E26
	Volts	120V	120V
	CRI	>80	>80
	Beam Angle	360°	360°
	Hours Rated	15,000Hrs	15,000Hrs
	Product Size	5.5"(H) x2.5"(Φ)	5.5"(H) x2.5"(Φ)
Electrical	IP Grade	IP20	IP20
	Power Factor	>0.7	>0.7
	Storage temperature	-25°C ~ 40°C	-25°C ~ 40°C
	Operating Temperature	-25°C ~ 40°C	-25°C ~ 40°C
Physical	Lens Material	Glass	Glass
	Bulb Head Color	Clear	Clear
	Weight (g)	42 (±5g)	42 (±5g)
Additional Information	Additional Info	Dimmable	Dimmable
	Warranty	3Years	3Years
Compliance	Certification	cUL	cUL



### Features & Specifications

#### Performance Data


- Available color temperature in 3000K/4000K/5000K
- 80+ CRI
- Electrical ratings : AC 120V 50-60Hz
- Estimated life: 15,000 hours
- Dimming Capable
- 2.5kV surge protection ( standard )
- -20°C~+40°C (the best in 25°C)

#### Compliances


- cUL
- IP20

### Dimensions & Weights

Model	VO-FST64W6.5-26	VO-FST64-WH-W6.5-26
Diameter in. (mm)	2.5(63)	2.5(63)
Height in. (mm)	5.5(139)	5.5(139)
Net weight (g)	42 (±5g)	42 (±5g)

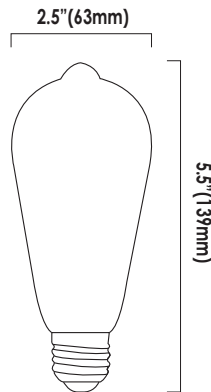


VO-FST64W6.5-26

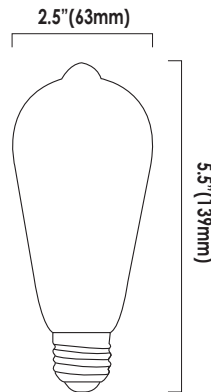

VO-FST64-WH-W6.5-26



### Product Details

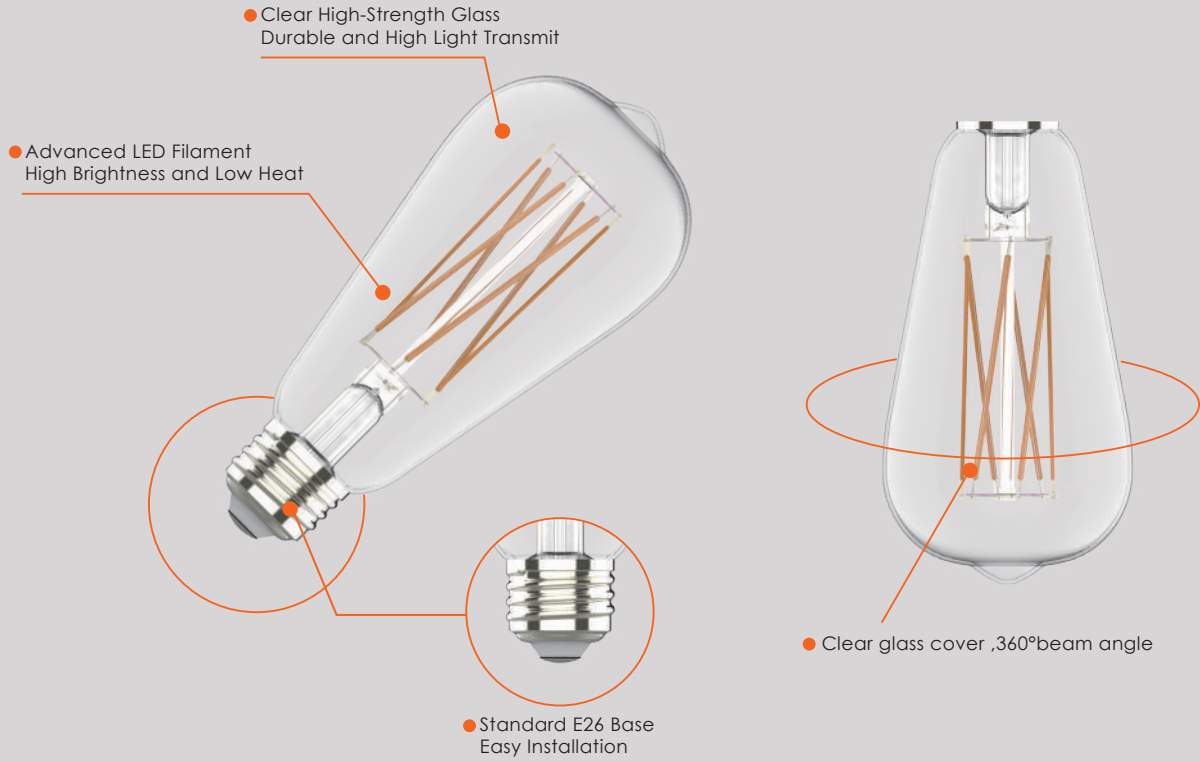

### Lumen Details

Model No.:	Watts (W)	2700K		3000K		4000K		5000K		6000K	
		Lumen Output (LM)	Efficiency (LM/W)	Lumen Output (LM)	Efficiency (LM/W)	Lumen Output (LM)	Efficiency (LM/W)	Lumen Output (LM)	Efficiency (LM/W)	Lumen Output (LM)	Efficiency (LM/W)
VO-FST64-WH-W6.5-26	6.5W	///	///	730	155	700	107	700	107	///	///
VO-FST64W6.5-26	6.5W	///	///	725	154	749	159	712	152	///	///



Data is based upon tests performed in a controlled environment. Actual performance can vary depending on operating conditions. All products are subject to change or may be discontinued any time without notice. Please contact your Votatec customer service representative to confirm inventory levels at time of order

